

LMP 112 / 123 series

MULTIPORT

Maximum working pressure up to 8 MPa (80 bar) - Flow rate up to 175 l/min



Description

Technical data

Low & Medium Pressure filters

Maximum working pressure up to 8 MPa (80 bar)
Flow rate up to 175 l/min

LMP MULTIPORT filters is a range of versatile low pressure filter for transmission, protection of sensitive components in low pressure hydraulic systems and filtration of the coolant into the machine tools. They are directly connected to the lines of the system through the hydraulic fittings.

Available features:

- Female threaded connections up to 1", for a maximum return flow rate of 175 l/min
- Fine filtration rating, to get a good cleanliness level into the system
- Bypass valve, to relieve excessive pressure drop across the filter media
- Visual, electrical and electronic differential clogging indicators
- Multiport and multifunction schemes, to meet any type of application.
- LMP112: 3/4" additional input port
- LMP116: 3/4" additional output port
- LMP118: 3/4" bypass port, to send the bypass flow to the reservoir instead of the system
- LMP119: 3/4" relief port, to relief the input pressure in the filter, protecting the components downstream the filter against back pressure caused by the pressure drop (cold starts)
- LMP120: connections placed in the same side
- LMP122: connections placed in the same side and 1" additional output port
- LMP123: 2 and 3 bar integrated relief valve

Common applications:

Delivery lines, in any low pressure industrial equipment or mobile machines

Filter housing materials

- Head: Aluminium
- Housing: Cataphoresis - Painted steel
- Bypass valve: Brass - Aluminium

Pressure

- Test pressure: 12 MPa (120 bar)
- Burst pressure:
LMP 112/119: 29 MPa (290 bar)
LMP 120/123: 38 MPa (380 bar)
- Pulse pressure fatigue test: 1 000 000 cycles with pressure from 0 to 8 MPa (80 bar)

Bypass valve

- Opening pressure 350 kPa (3.5 bar) ±10%
- Other opening pressures on request.

Δp element type

- Microfibre filter elements - series N - W: 20 bar
- Wire mesh filter elements - series N: 20 bar
- Fluid flow through the filter element from OUT to IN

Seals

- Standard NBR series A
- Optional FPM series V

Temperature

From -25 °C to +110 °C

Note

LMP MULTIPORT filters are provided for vertical mounting

Weights [kg] and volumes [dm³]

Filter series	Weights [kg]					Volumes [dm ³]				
	Length	1	2	3	4	Length	1	2	3	4
LMP 112-116-118-119		1.60	1.80	2.10	2.60		0.75	0.81	1.11	1.53
LMP 120-122		1.90	2.10	2.40	2.90		0.75	0.81	1.11	1.53
LMP 123		1.70	1.90	2.20	2.70		0.75	0.81	1.11	1.53

Flow rates [l/min]

Filter series	Length	Filter element design - N Series							
		A03	A06	A10	A16	A25	M25 M60 M90	P10	P25
LMP 112	1	36	38	55	57	67	105	84	86
	2	44	49	66	66	76	105	93	94
	3	56	58	71	77	87	106	96	97
	4	67	77	85	88	97	106	99	99
LMP 116	1	36	38	54	56	64	96	79	80
	2	43	49	63	64	72	96	86	87
	3	54	57	68	73	82	96	88	89
	4	65	73	79	82	89	96	91	91
LMP 118	1	40	42	65	69	85	163	117	120
	2	49	57	83	83	101	163	136	138
LMP 119	3	66	70	92	102	124	164	142	144
	4	86	102	118	124	144	165	148	149
LMP 120	1	40	43	66	70	87	172	121	125
	2	50	58	85	85	104	172	142	144
	3	67	71	94	105	129	173	149	151
	4	88	106	122	129	151	174	155	157
LMP 122	1	39	42	64	67	81	146	109	111
	2	49	56	80	80	96	146	124	126
	3	65	68	88	96	114	146	129	130
	4	82	97	110	115	131	147	134	135

Maximum flow rate for a complete low and medium pressure filter with a pressure drop $\Delta p = 0.7$ bar.The reference fluid has a kinematic viscosity of 30 mm²/s (cSt) and a density of 0.86 kg/dm³.For different pressure drop or fluid viscosity we recommend to use our selection software available on www.mpfiltr.com.

You can also calculate the right size using the formulas present on the FILTER SIZING paragraph at the beginning of the full catalogue or at the beginning of the filter family brochure. Please, contact our Sales Department for further additional information.


Filter series	Length	Filter element design - N Series							
		A03	A06	A10	A16	A25	M25 M60 M90	P10	P25
LMP 123	1	35	37	50	52	59	83	70	71
	2	41	46	58	58	65	83	76	76
	3	51	53	62	65	72	83	77	78
	4	59	65	70	72	78	83	79	79

Maximum flow rate for a complete low and medium pressure filter with a pressure drop $\Delta p = 2.7$ bar.The reference fluid has a kinematic viscosity of 30 mm²/s (cSt) and a density of 0.86 kg/dm³.For different pressure drop or fluid viscosity we recommend to use our selection software available on www.mpfiltr.com.


You can also calculate the right size using the formulas present on the FILTER SIZING paragraph at the beginning of the full catalogue or at the beginning of the filter family brochure. Please, contact our Sales Department for further additional information.

Pressure drop









Filter housings Δp pressure drop

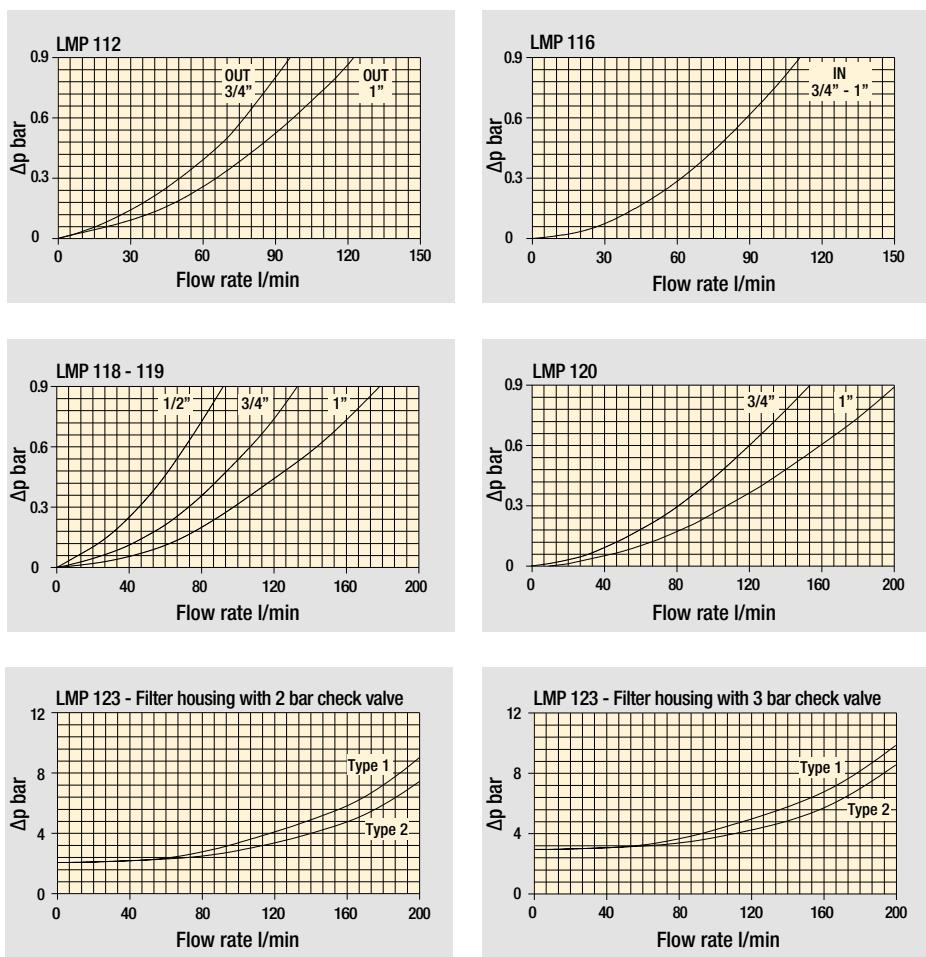

Bypass valve pressure drop

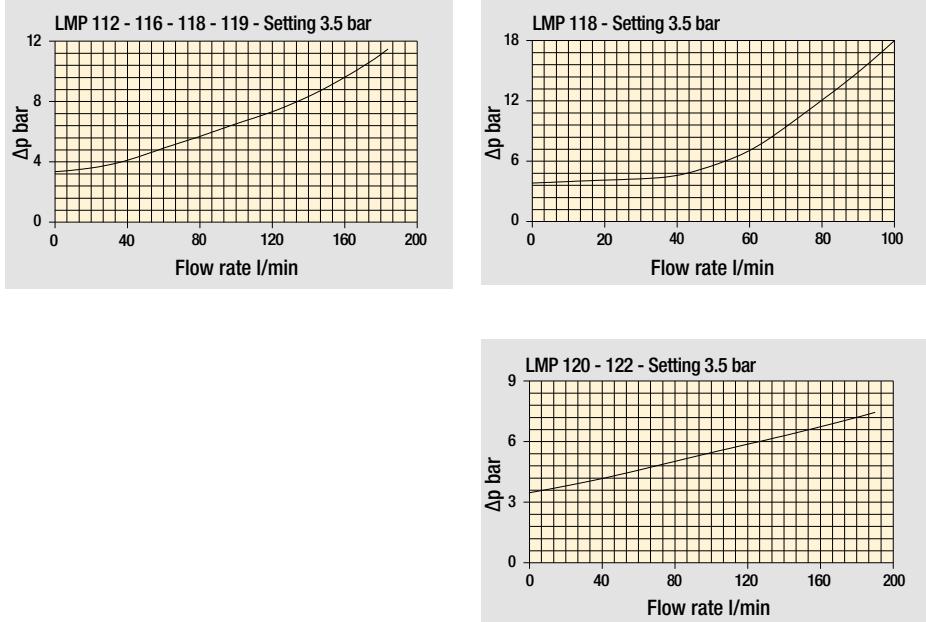

The curves are plotted using mineral oil with density of 0.86 kg/dm³ in compliance with ISO 3968. Δp varies proportionally with density.

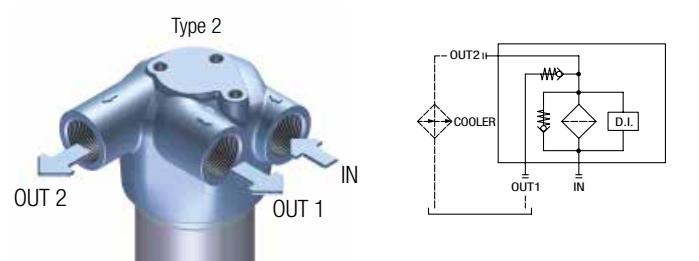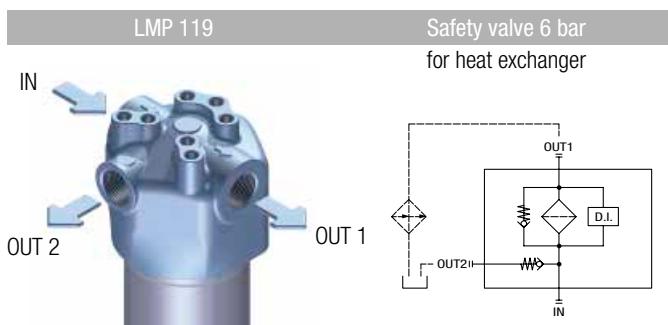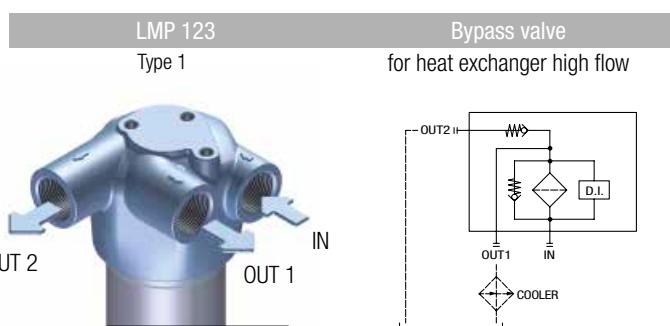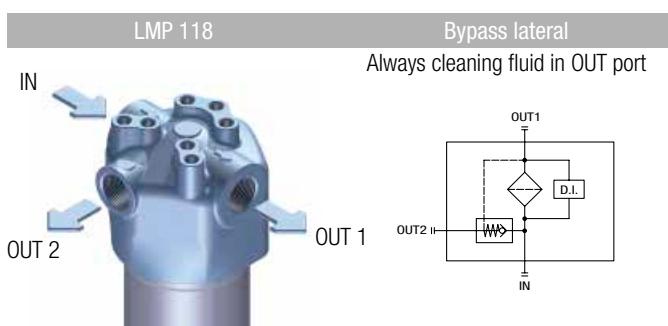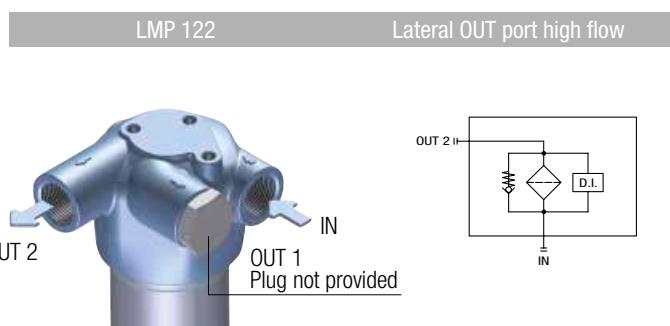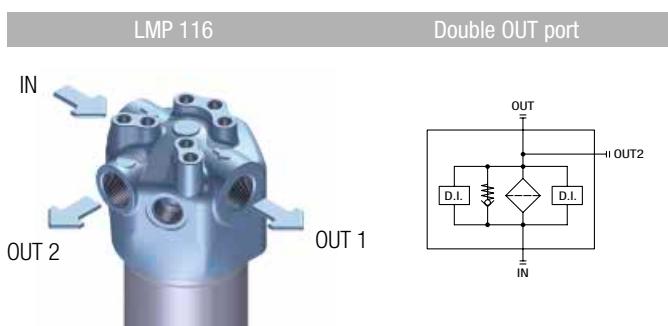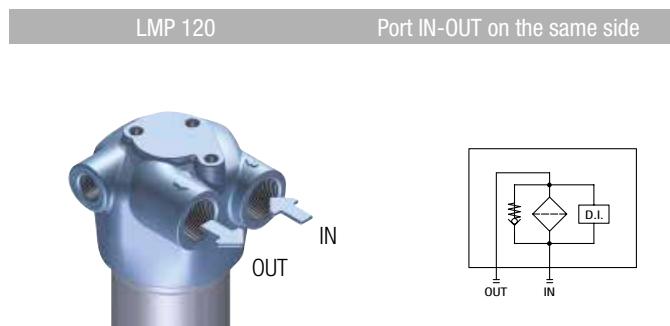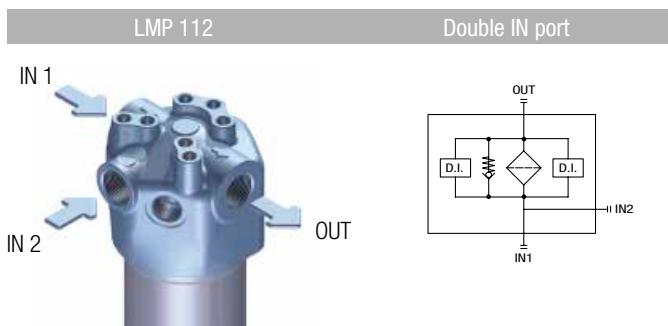

Designation & Ordering code

COMPLETE FILTER

Series and size LMP112 LMP116	Configuration example: LMP112 4 B A D 1 A10 N P01
Length 1 2 3 4	
Bypass valve S Without bypass B With bypass 3.5 bar	
Seals and treatments A NBR V FPM	
Connections	Aux (only LMP 112 - 116)
A G 3/4" B G 1" C 3/4" NPT D 1" NPT E SAE 12 - 1 1/16" - 12 UN F SAE 16 - 1 5/16" - 12 UN	G 3/4" G 3/4" 3/4" NPT 3/4" NPT SAE 12 - 1 1/16" - 12 UN SAE 12 - 1 1/16" - 12 UN
Connection for differential pressure indicator	
1 Without 2 With standard connection 3 With connection on the opposite side 6 With two connections on both sides	
Filtration rating (filter media)	
A03 Inorganic microfiber 3 µm A06 Inorganic microfiber 6 µm A10 Inorganic microfiber 10 µm A16 Inorganic microfiber 16 µm A25 Inorganic microfiber 25 µm	M25 Wire mesh 25 µm M60 Wire mesh 60 µm M90 Wire mesh 90 µm P10 Resin impregnated paper 10 µm P25 Resin impregnated paper 25 µm
Element Δp N 20 bar	Execution P01 MP Filtri standard Pxx Customized

FILTER ELEMENT

Element series and size CU110	Configuration example: CU110 4 A10 A N P01
Element length 1 2 3 4	
Filtration rating (filter media)	
A03 Inorganic microfiber 3 µm A06 Inorganic microfiber 6 µm A10 Inorganic microfiber 10 µm A16 Inorganic microfiber 16 µm A25 Inorganic microfiber 25 µm	M25 Wire mesh 25 µm M60 Wire mesh 60 µm M90 Wire mesh 90 µm P10 Resin impregnated paper 10 µm P25 Resin impregnated paper 25 µm
Seals and treatments A NBR V FPM	Element Δp N 20 bar
	Execution P01 MP Filtri standard Pxx Customized

CLOGGING INDICATORS

See page 726

DEA Electrical differential pressure indicator
DEM Electrical differential pressure indicator
DEU Electrical differential pressure indicator
DLA Electrical / visual differential pressure indicator

DLE Electrical / visual differential pressure indicator
DTA Electronic differential pressure indicator
DVA Visual differential pressure indicator
DVM Visual differential pressure indicator


PLUGS

See page 747


T2 Plug (not included)

LMP112 - LMP116

Filter length	H [mm]
1	182
2	215
3	265
4	365

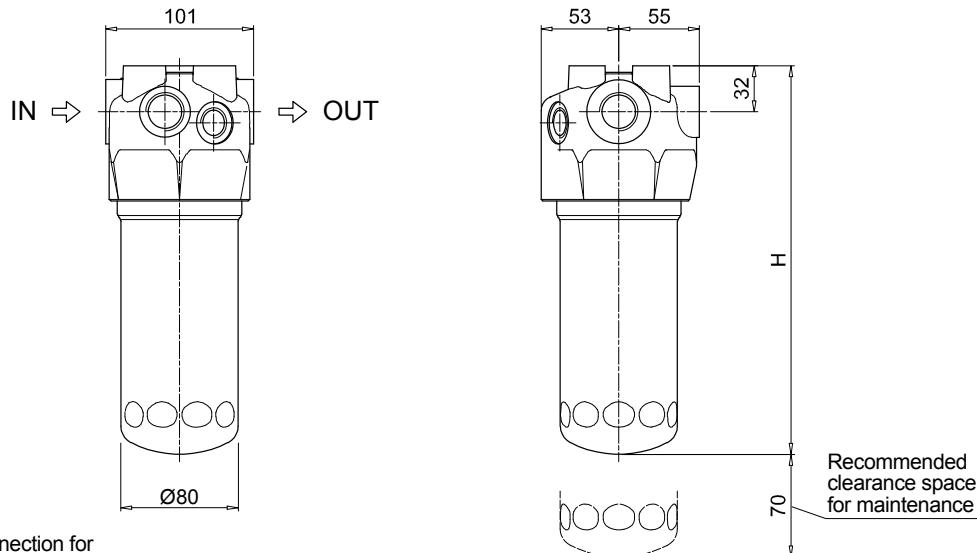


2 - Standard connection for diff. pressure indicator
T2 plug not included

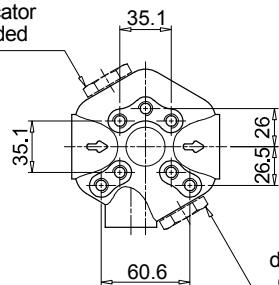


3 - Connection for diff. pressure indicator
on the opposite side
T2 plug not included

Fixing holes
Option for Metric and UNC screws

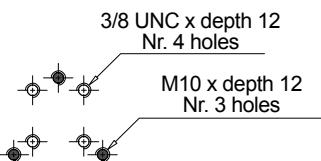


LMP 112

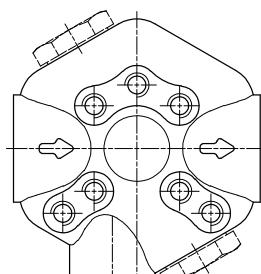

Aux
IN

LMP 116

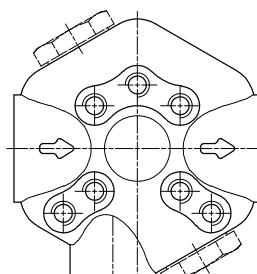

Aux
OUT

Designation & Ordering code

COMPLETE FILTER

Series and size	Configuration example: LMP118 4 B A D 1 A10 N P01								
LMP118 LMP119									
Length	1 2 3 4								
Bypass valve	B With bypass 3.5 bar								
Seals and treatments									
A NBR									
V FPM									
Connections									
Aux OUT									
A G 3/4"	G 3/4"								
B G 1"	G 3/4"								
C 3/4" NPT	3/4" NPT								
D 1" NPT	3/4" NPT								
E SAE 12 - 1 1/16" - 12 UN	SAE 12 - 1 1/16" - 12 UN								
F SAE 16 - 1 5/16" - 12 UN	SAE 12 - 1 1/16" - 12 UN								
Connection for differential pressure indicator									
1 Without									
2 With standard connection									
Filtration rating (filter media)									
A03 Inorganic microfiber 3 µm	M25 Wire mesh 25 µm								
A06 Inorganic microfiber 6 µm	M60 Wire mesh 60 µm								
A10 Inorganic microfiber 10 µm	M90 Wire mesh 90 µm								
A16 Inorganic microfiber 16 µm	P10 Resin impregnated paper 10 µm								
A25 Inorganic microfiber 25 µm	P25 Resin impregnated paper 25 µm								
Element Δp									
N 20 bar									
Execution									
P01 MP Filtri standard									
Pxx Customized									

FILTER ELEMENT

Element series and size	Configuration example: CU110 4 A10 A N P01								
CU110									
Element length	1 2 3 4								
Filtration rating (filter media)									
A03 Inorganic microfiber 3 µm	M25 Wire mesh 25 µm								
A06 Inorganic microfiber 6 µm	M60 Wire mesh 60 µm								
A10 Inorganic microfiber 10 µm	M90 Wire mesh 90 µm								
A16 Inorganic microfiber 16 µm	P10 Resin impregnated paper 10 µm								
A25 Inorganic microfiber 25 µm	P25 Resin impregnated paper 25 µm								
Seals and treatments									
A NBR									
V FPM									
Element Δp									
N 20 bar									
Execution									
P01 MP Filtri standard									
Pxx Customized									

CLOGGING INDICATORS

See page 726

DEA	Electrical differential pressure indicator
DEM	Electrical differential pressure indicator
DEU	Electrical differential pressure indicator
DLA	Electrical / visual differential pressure indicator

DLE	Electrical / visual differential pressure indicator
DTA	Electronic differential pressure indicator
DVA	Visual differential pressure indicator
DVM	Visual differential pressure indicator



PLUGS

See page 747



T2	Plug (not included)
-----------	---------------------

LMP118 - LMP119

Filter length	H [mm]
1	182
2	215
3	265
4	365

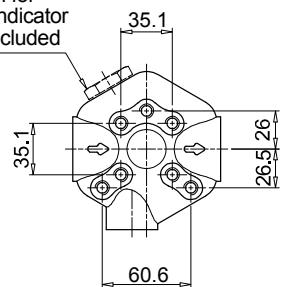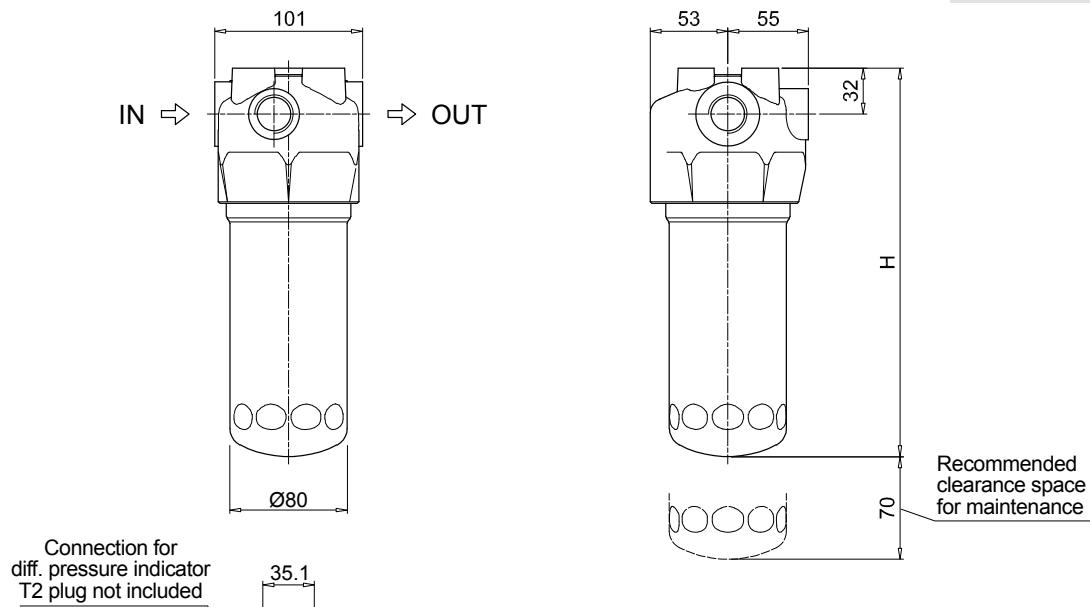

Fixing holes
Option for Metric and UNC screws

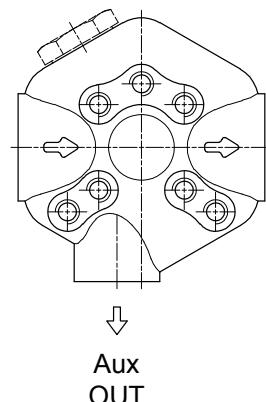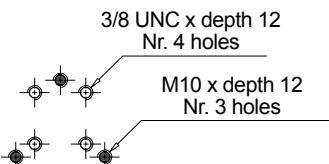

Designation & Ordering code

COMPLETE FILTER

Series and size	Configuration example: LMP120 4 B A D 1 A10 N P01							
LMP120 LMP122								
Length	1 2 3 4							
Bypass valve	S Without bypass B With bypass 3.5 bar							
Seals and treatments								
A NBR								
V FPM								
Connections	LMP120	LMP122						
A G 3/4"	•	-						
B G 1"	•	•						
C 3/4" NPT	•	-						
D 1" NPT	•	•						
E SAE 12 - 1 1/16" - 12 UN	•	-						
F SAE 16 - 1 5/16" - 12 UN	•	•						
Connection for differential pressure indicator								
1 Without								
2 With standard connection								
Filtration rating (filter media)								
A03 Inorganic microfiber 3 µm	M25 Wire mesh 25 µm							
A06 Inorganic microfiber 6 µm	M60 Wire mesh 60 µm							
A10 Inorganic microfiber 10 µm	M90 Wire mesh 90 µm							
A16 Inorganic microfiber 16 µm	P10 Resin impregnated paper 10 µm							
A25 Inorganic microfiber 25 µm	P25 Resin impregnated paper 25 µm							
Element Δp								
N 20 bar								
Execution								
P01 MP Filtri standard								
Pxx Customized								

FILTER ELEMENT

Element series and size	Configuration example: CU110 4 A10 A N P01							
CU110								
Element length	1 2 3 4							
Filtration rating (filter media)								
A03 Inorganic microfiber 3 µm	M25 Wire mesh 25 µm							
A06 Inorganic microfiber 6 µm	M60 Wire mesh 60 µm							
A10 Inorganic microfiber 10 µm	M90 Wire mesh 90 µm							
A16 Inorganic microfiber 16 µm	P10 Resin impregnated paper 10 µm							
A25 Inorganic microfiber 25 µm	P25 Resin impregnated paper 25 µm							
Seals and treatments								
A NBR								
V FPM								
Element Δp								
N 20 bar								
Execution								
P01 MP Filtri standard								
Pxx Customized								

CLOGGING INDICATORS

See page 726



DEA Electrical differential pressure indicator
DEM Electrical differential pressure indicator
DEU Electrical differential pressure indicator
DLA Electrical / visual differential pressure indicator

DLE Electrical / visual differential pressure indicator
DTA Electronic differential pressure indicator
DVA Visual differential pressure indicator
DVM Visual differential pressure indicator

PLUGS

See page 747

T2 Plug

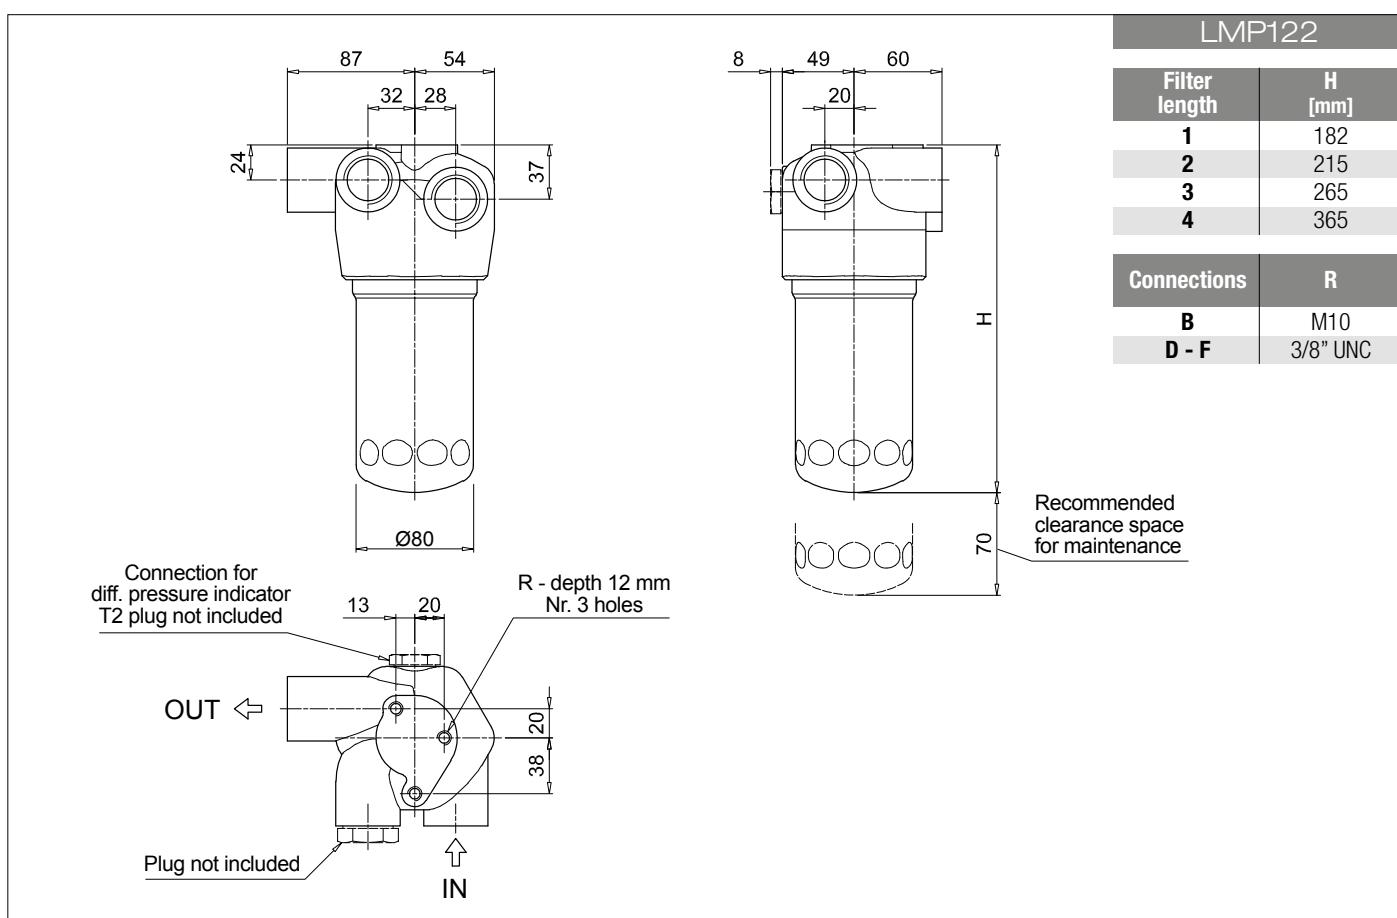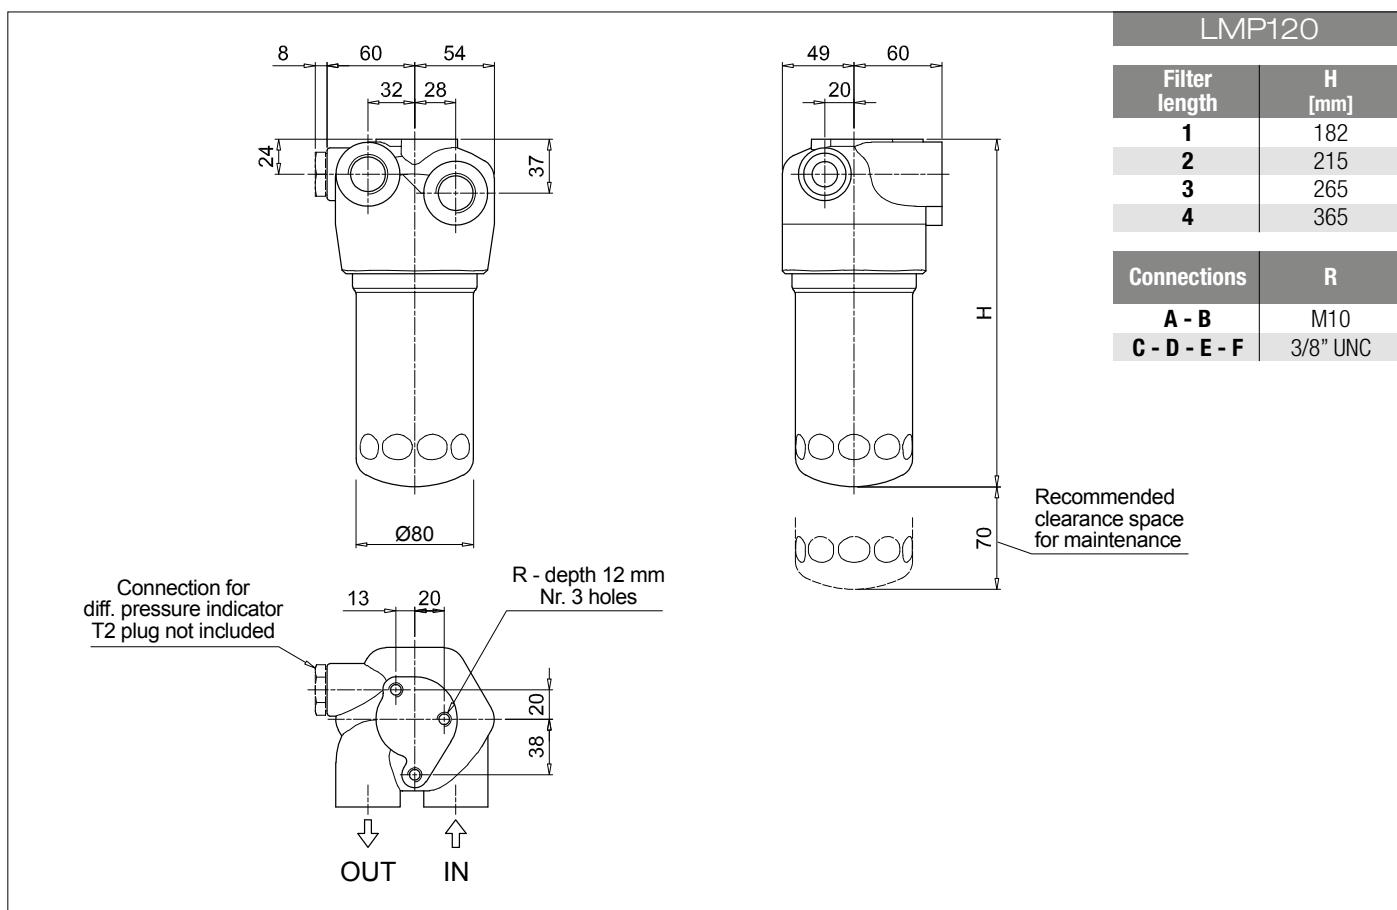

Designation & Ordering code

COMPLETE FILTER										
Series and size				Configuration example: LMP123 4 R A F 1 A10 N P01						
LMP123										
Length										
1 2 3 4										
Valves		Bypass	OUT to cooler	Check valve						
C		without	front	2 bar						
D				3 bar						
G		side		2 bar						
H				3 bar						
M		With bypass 3.5 bar	front	2 bar						
N				3 bar						
Q			side		2 bar					
R		3 bar								
Seals and treatments										
A	NBR									
V	FPM									
Connections										
B	G 1"									
F	SAE 16 - 1 5/16" - 12 UN									
Connection for differential pressure indicator										
1	Without									
2	With standard connection									
Filtration rating (filter media)										
A03	Inorganic microfiber 3 µm	M25	Wire mesh 25 µm							
A06	Inorganic microfiber 6 µm	M60	Wire mesh 60 µm							
A10	Inorganic microfiber 10 µm	M90	Wire mesh 90 µm							
A16	Inorganic microfiber 16 µm	P10	Resin impregnated paper 10 µm							
A25	Inorganic microfiber 25 µm	P25	Resin impregnated paper 25 µm							
						Element Δp				
N 20 bar										
Execution										
P01 MP Filtri standard										
Pxx Customized										

FILTER ELEMENT										
Element series and size				Configuration example: CU110 4 A10 A N P01						
CU110										
Element length										
1 2 3 4										
Filtration rating (filter media)										
A03	Inorganic microfiber 3 µm	M25	Wire mesh 25 µm							
A06	Inorganic microfiber 6 µm	M60	Wire mesh 60 µm							
A10	Inorganic microfiber 10 µm	M90	Wire mesh 90 µm							
A16	Inorganic microfiber 16 µm	P10	Resin impregnated paper 10 µm							
A25	Inorganic microfiber 25 µm	P25	Resin impregnated paper 25 µm							
						Seals and treatments				
A NBR						Element Δp				
V FPM						N 20 bar				
Execution										
P01 MP Filtri standard										
Pxx Customized										

CLOGGING INDICATORS

See page 726

DEA	Electrical differential pressure indicator
DEM	Electrical differential pressure indicator
DEU	Electrical differential pressure indicator
DLA	Electrical / visual differential pressure indicator

DLE	Electrical / visual differential pressure indicator
DTA	Electronic differential pressure indicator
DVA	Visual differential pressure indicator
DVM	Visual differential pressure indicator


PLUGS

See page 747

T2	Plug
----	------



LMP123	
Filter length	H [mm]
1	182
2	215
3	265
4	365

Connections	R
B	M10
F	3/8" UNC

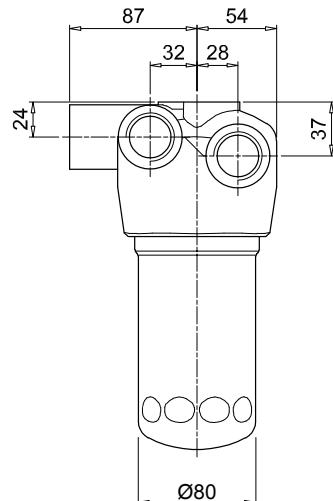

Connection for diff. pressure indicator T2 plug not included

R - depth 12 mm
Nr. 3 holes

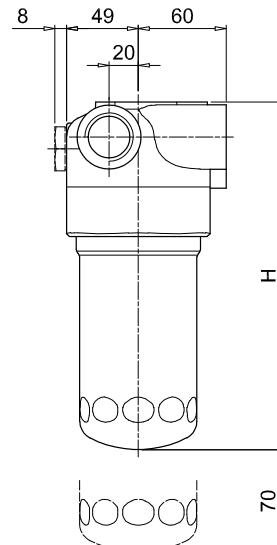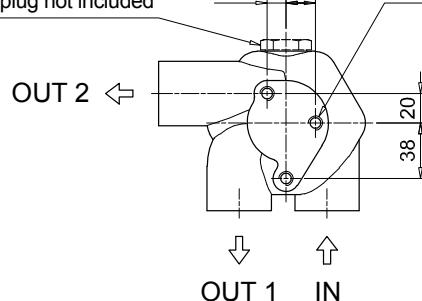


Recommended clearance space for maintenance

Order number for spare parts

LMP 112 - 116 - 118 - 119

LMP 120

LMP 122 - 123

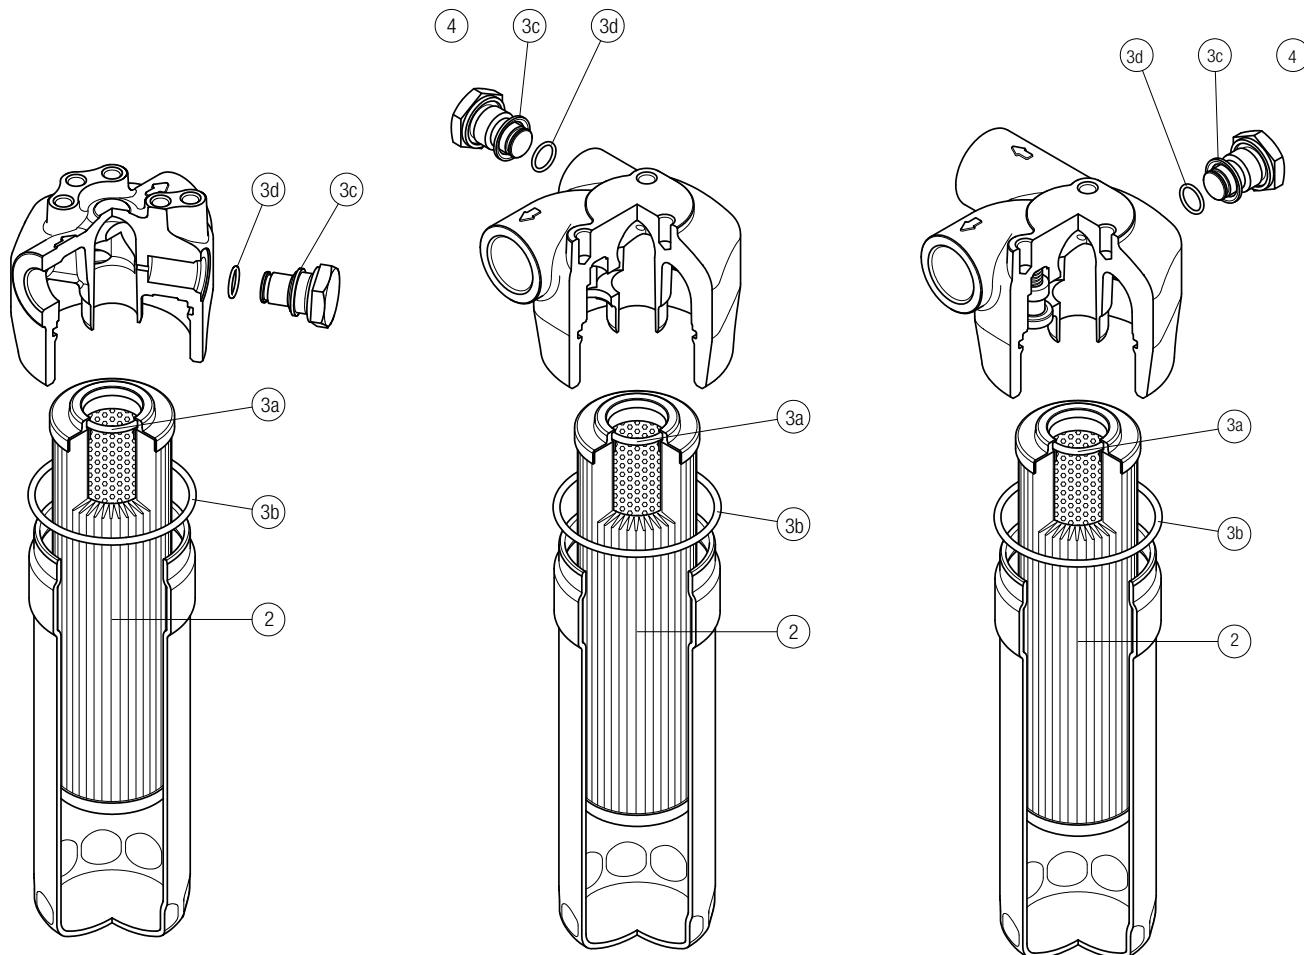

Item:	Q.ty: 1 pc. 2	Q.ty: 1 pc.		Q.ty: 1 pc. 4	
		Filter element	Seal Kit code number NBR FPM	Indicator connection plug NBR FPM	
Filter series					
LMP 112-116 -118-119	See order table				
LMP 120		02050478	02050479	T2H	T2V
LMP 122-123					

CLOGGING INDICATORS LOW & MEDIUM PRESS. FILTERS

Designation & Ordering code

DIFFERENTIAL PRESSURE INDICATORS

Series
DE Electrical differential pressure indicator
DL Electrical/Visual differential pressure indicator
DT Electronic differential pressure indicator
DV Visual differential pressure indicator

Configuration example 1:	DE	M	20	H	F	50	P01	
Configuration example 2:	DE	U	50	V	A	50	P01	UL
Configuration example 3:	DL	E	50	V	A	71	P01	
Configuration example 4:	DT	A	20	H	F	70	P01	
Configuration example 5:	DV	M	50	V			P01	

Type	DE	DL	DT	DV
A Standard type	•	•	•	A With automatic reset
M With wired electrical connection	•	-	-	M With manual reset
U Standard type 210 bar, UL certified	•	-	-	S With automatic reset
E For high power supply	-	•	-	
S Compact version	•	-	-	

Pressure setting	DEA	DEM	DEU	DES	DLA	DLE	DTA	DVA	DVM	DVS
12 1.2 bar	•	•	-	•	•	•	•	•	•	•
20 2.0 bar	•	•	•	-	•	•	•	•	•	-
25 2.5 bar	-	-	-	-	-	-	-	-	-	•
40 4.0 bar	-	-	-	•	-	-	-	-	-	•
50 5.0 bar	•	•	•	-	•	•	•	•	•	-

Seals	DEA	DEM	DEU	DES	DL	DT	DVA	DVM	DVS
H HNBR	•	•	-	•	•	•	•	•	•
V FPM	•	•	•	-	•	•	•	•	-

Thermostat	DEA	DEM	DEU	DES	DLA	DLE	DT
A Without thermostat	•	•	•	•	•	•	-
F With thermostat	-	•	-	-	-	•	•

Electrical connections	DEA	DEM	DEU	DES	DLA	DLE	DT
10 Connection AMP Superseal series 1.5	-	•	-	•	-	-	-
20 Connection AMP Timer Junior	-	•	-	-	-	-	-
30 Connection Deutsch DT-04-2-P	-	•	-	•	-	-	-
35 Connection Deutsch DT-04-3-P	-	•	-	-	-	-	-
50 Connection EN 175301-803	•	-	•	-	-	•	-
51 Connection EN 175301-803, transparent base with lamps 24 Vdc	-	-	-	-	•	-	-
52 Connection EN 175301-803, transparent base with lamps 110 Vdc	-	-	-	-	•	-	-
70 Connection IEC 61076-2-101 D (M12)	-	-	-	-	-	-	•
71 Connection IEC 61076-2-101 D (M12), black base with lamps 24 Vdc	-	-	-	-	•	-	-
80 Connection Stud #10-32 UNF	-	-	-	•	-	-	-

Option
P01 MP Filtri standard
Pxx Customized

Certifications	DEU	OTHERS
Without	-	•
UL UL certification	•	-

PLUGS

Series
T2 Plug
T4 Plug

Configuration example **T2** **H**

Seals	T2	T4
A NBR	-	•
H HNBR	•	-
V FPM	•	-