

# FRI series

Maximum working pressure up to 2 MPa (20 bar) - Flow rate up to 2500 l/min



## Description

## Technical data

**Return filter****Maximum working pressure up to 2 MPa (20 bar)****Flow rate up to 2500 l/min**

FRI is a range of return filters for protection of the reservoir against the system contamination.

They could be directly fixed to the reservoir in immersed or semi-immersed position or connected to the lines of the system through the hydraulic fittings.

The filter output must be always immersed into the fluid to avoid aeration or foam generation into the reservoir.

**Available features:**

- Female threaded connections up to 2 1/2" and flanged connections up to 3 1/2", for a maximum flow rate of 2500 l/min
- Double input connections, to connect several return lines or drains
- Fine filtration rating, to get a good cleanliness level into the reservoir
- Bypass valve, to relieve excessive pressure drop across the filter media
- Visual, electrical and electronic differential clogging indicators

**Common applications:**

Heavy duty industrial equipment

**Filter housing materials****Filter body**

Aluminium: FRI 255

Anodized Aluminium: FRI 025-040-100-250-630

Phosphatized Steel: FRI 850

**Cover**

Polyamide, GF reinforced: FRI 255

Anodized Aluminium: FRI 025-040-100-250-630-850

**Valve**: Polyamide, GF reinforced - Steel**Bypass valve**

Opening pressure 240 kPa (2.4 bar) ±10%

**Δp element type**

- Microfibre filter elements - series N: 10 bar

- Fluid flow through the filter element from OUT to IN

**Seals**

- Standard NBR series A

- Optional FPM series V

**Temperature**

From -25 °C to +110 °C

**Note**

FRI filters are provided  
for vertical mounting

**Weights [kg] and volumes [dm<sup>3</sup>]**

Filter series	Weights [kg]		Volumes [dm <sup>3</sup> ]	
	Length	1	Length	1
<b>FRI 025</b>		1.0		0.28
<b>FRI 040</b>		2.0		0.70
<b>FRI 100</b>		3.8		1.09
<b>FRI 250</b>		6.3		2.60
<b>FRI 255</b>		4.2		3.20
<b>FRI 630</b>		13.8		7.05
<b>FRI 850</b>		48.0		21.50



Flow rates [l/min]

Filter series	Length	Filter element design - N Series						P10	P25
		A03	A06	A10	A16	A25	M25 M60 M90		
<b>FRI 025</b>	<b>1</b>	6	10	17	19	43	122	43	47
<b>FRI 040</b>	<b>1</b>	19	23	43	45	94	155	94	102
<b>FRI 100</b>	<b>1</b>	32	34	89	92	187	260	187	206
<b>FRI 250</b>	<b>1</b>	144	179	271	300	448	645	448	490
<b>FRI 255</b>	<b>1</b>	144	179	271	300	448	645	448	490
<b>FRI 630</b>	<b>1</b>	242	279	508	577	834	1446	834	911
<b>FRI 850</b>	<b>1</b>	440	541	971	1143	1705	2528	1705	1880




**Maximum flow rate for a complete return filter with a pressure drop  $\Delta p = 0.5$  bar.**The reference fluid has a kinematic viscosity of 30 mm<sup>2</sup>/s (cSt) and a density of 0.86 kg/dm<sup>3</sup>.For different pressure drop or fluid viscosity we recommend to use our selection software available on [www.mpfilttri.com](http://www.mpfilttri.com).You can also calculate the right size using the formulas present on the FILTER SIZING paragraph at the beginning of the full catalogue or at the beginning of the filter family brochure.  
Please, contact our Sales Department for further additional information.

## Hydraulic symbols





Filter series	Style 1 connection + Diff. indic.	Style 2 connections + Diff. indic.
<b>FRI 025</b>		•
<b>FRI 040</b>		•
<b>FRI 100</b>		•
<b>FRI 250</b>		•
<b>FRI 255</b>	•	
<b>FRI 630</b>		•
<b>FRI 850</b>	•	



## Pressure drop

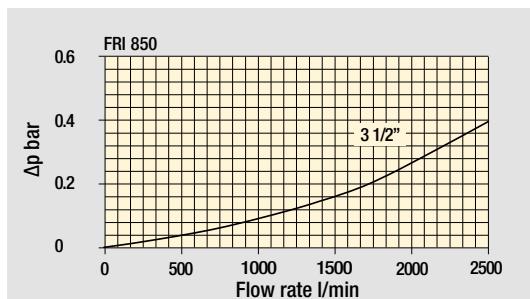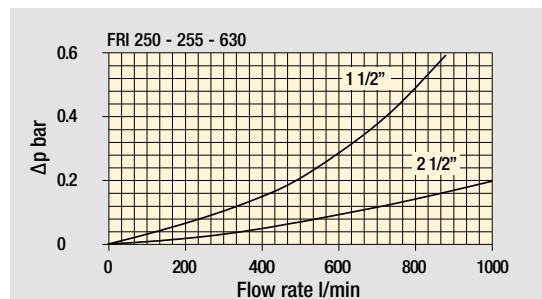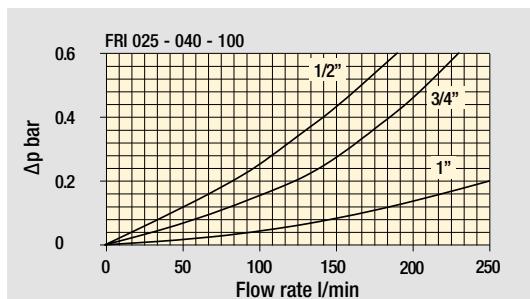Filter housings  $\Delta p$  pressure drop

## Bypass valve pressure drop

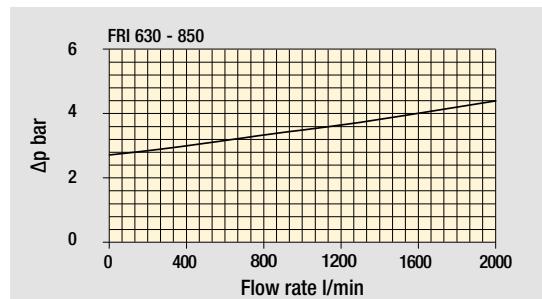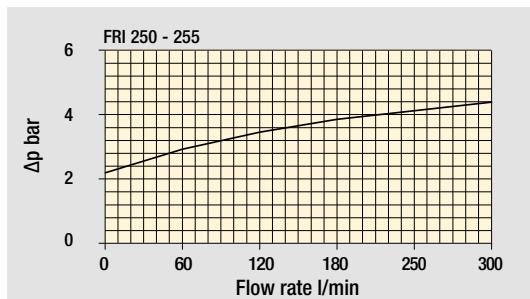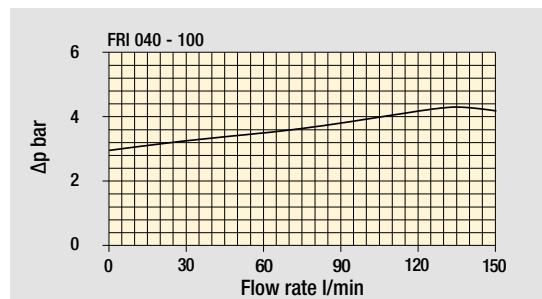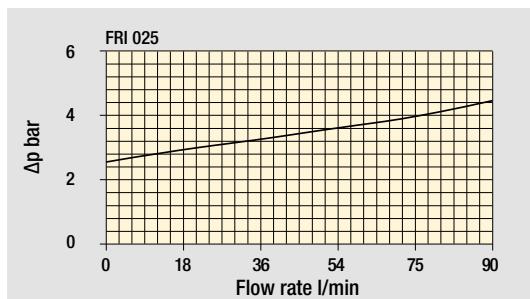

The curves are plotted using mineral oil with density of 0.86 kg/dm<sup>3</sup> in compliance with ISO 3968.  $\Delta p$  varies proportionally with density.



## Designation &amp; Ordering code

COMPLETE FILTER							
<b>Series and size</b>	Configuration example 1: FRI025 B A G1 A25 N P01						
FRI025		B	A	G1	A25	N	P01
FRI040		S	V	G2	M25	N	P01
<b>Bypass valve</b>							
B With bypass 2.4 bar							
S Without bypass							
<b>Seals and treatments</b>							
A NBR							
V FPM							
<b>Connections for FRI025</b>	<b>Connections for FRI040</b>						
G1 G 1/2"	G 3/4"						
G2 1/2" NPT	3/4" NPT						
G3 SAE 8 - 3/4" - 16 UNF	SAE 12 - 1 1/16" - 12 UN						
<b>Filtration rating (filter media)</b>							
A03 Inorganic microfiber 3 µm	M25 Wire mesh 25 µm						
A06 Inorganic microfiber 6 µm	M60 Wire mesh 60 µm						
A10 Inorganic microfiber 10 µm	M90 Wire mesh 90 µm						
A16 Inorganic microfiber 16 µm	P10 Resin impregnated paper 10 µm						
A25 Inorganic microfiber 25 µm	P25 Resin impregnated paper 25 µm						
<b>Element Δp</b>							
N 10 bar							
<b>Execution</b>							
P01 MP Filtri standard							
Pxx Customized							

FILTER ELEMENT							
<b>Element series and size</b>	Configuration example 1: CU025 A25 N P01						
CU025		A25	N	P01			
CU040		M25	M25	V	P01		
<b>Filtration rating (filter media)</b>							
A03 Inorganic microfiber 3 µm	M25 Wire mesh 25 µm						
A06 Inorganic microfiber 6 µm	M60 Wire mesh 60 µm						
A10 Inorganic microfiber 10 µm	M90 Wire mesh 90 µm						
A16 Inorganic microfiber 16 µm	P10 Resin impregnated paper 10 µm						
A25 Inorganic microfiber 25 µm	P25 Resin impregnated paper 25 µm						
<b>Seals and treatments</b>							
N NBR							
V FPM							
<b>Execution</b>							
P01 MP Filtri standard							
Pxx Customized							

## CLOGGING INDICATORS

See page 720-721



- DEA Electrical differential pressure indicator  
 DEM Electrical differential pressure indicator  
 DEU Electrical differential pressure indicator  
 DLA Electrical / visual differential pressure indicator

- DLE Electrical / visual differential pressure indicator  
 DTA Electronic differential pressure indicator  
 DVA Visual differential pressure indicator  
 DVM Visual differential pressure indicator

## PLUGS

See page 747

- T2 Plug (not included)

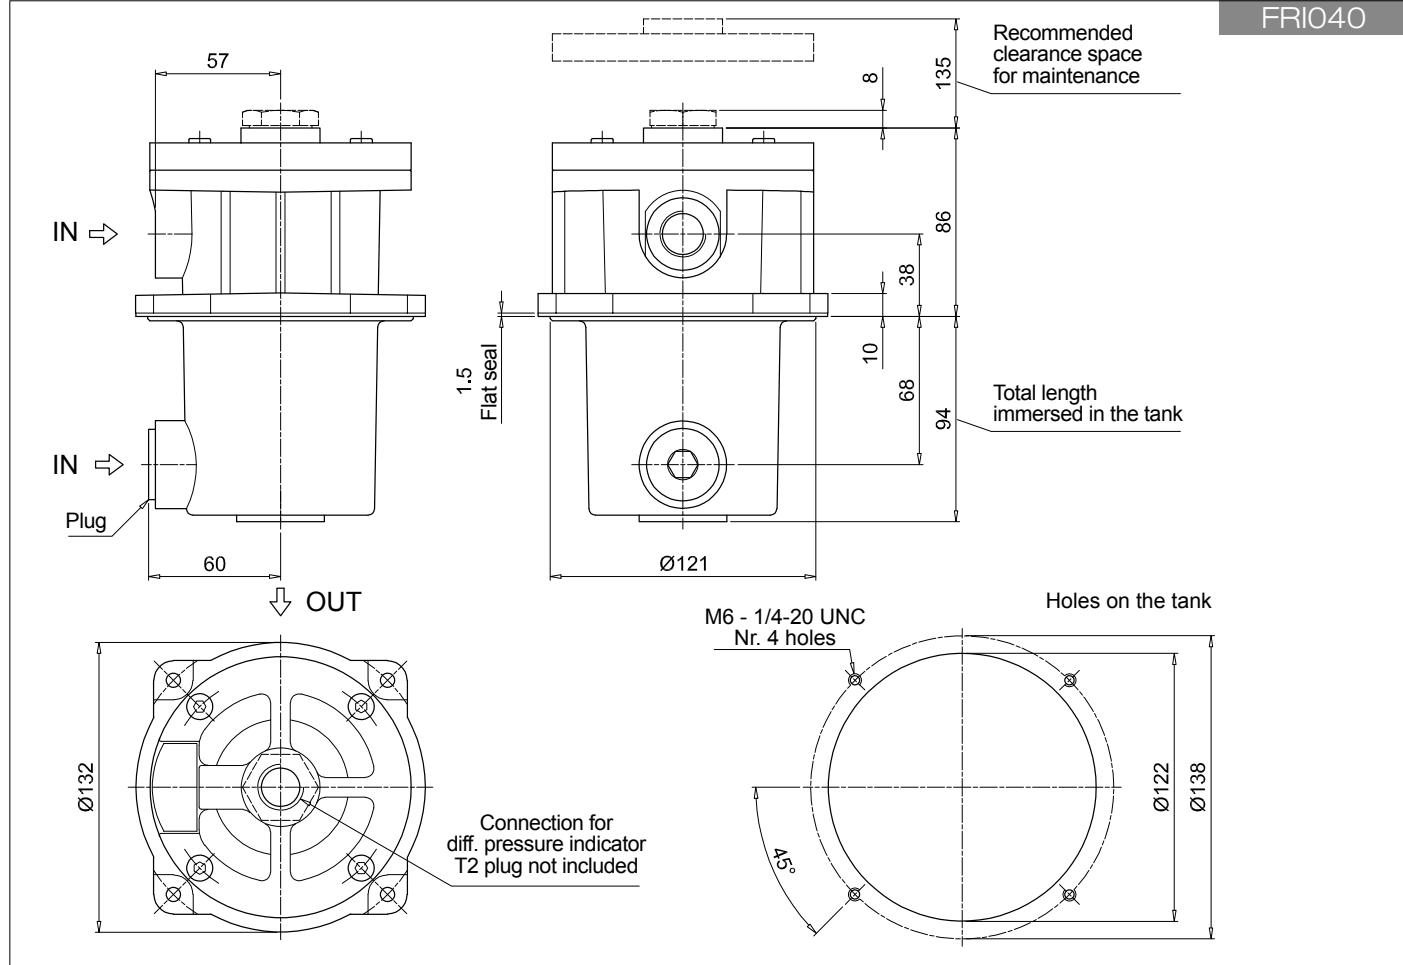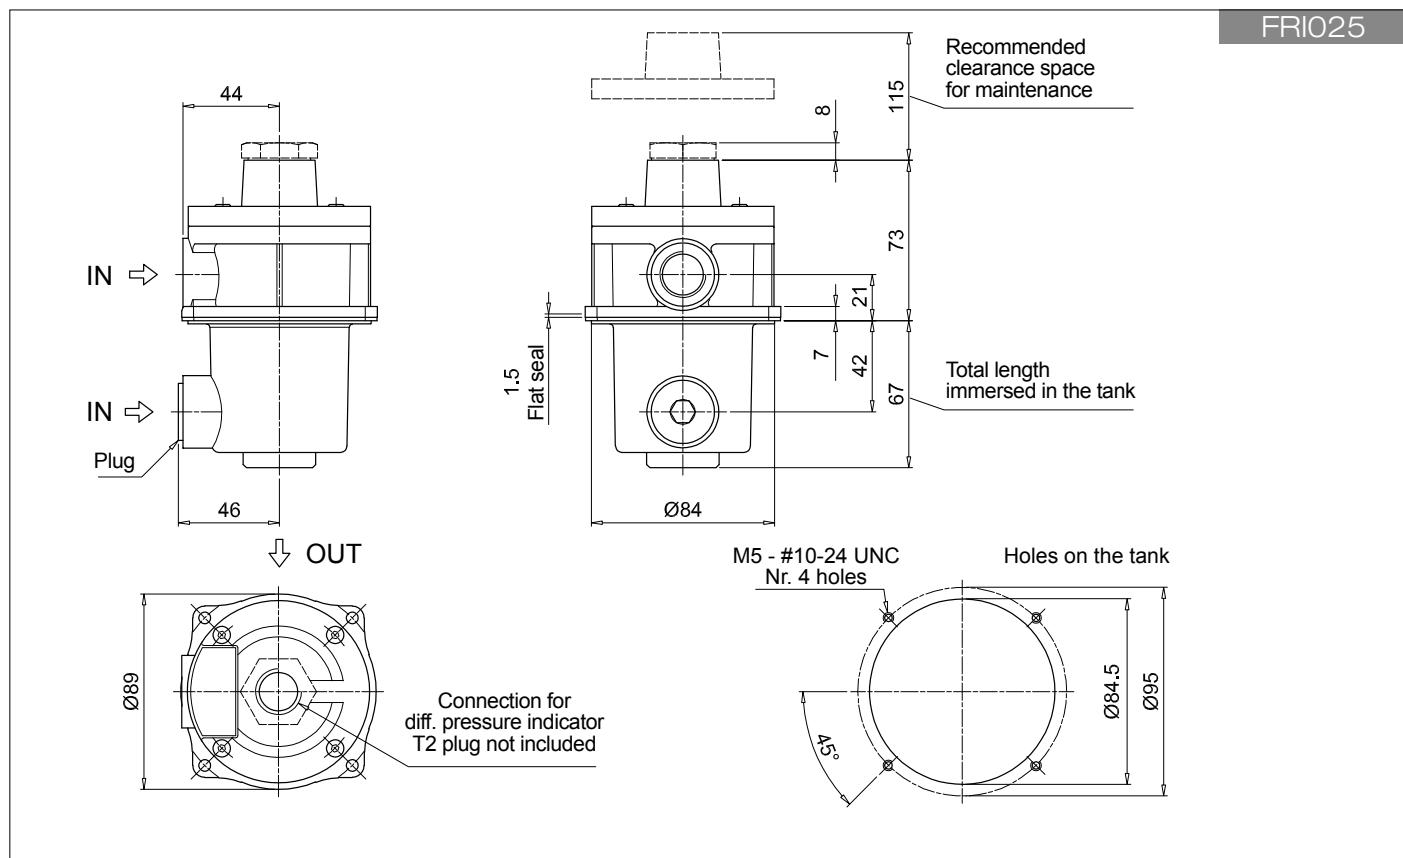

## Designation &amp; Ordering code

**COMPLETE FILTER**

<b>Series and size</b>	Configuration example 1:	FRI100	B	A	G1	A25	N	P01
<b>FRI100</b>	Configuration example 2:	FRI630	S	V	F2	M25	N	P01
<b>FRI250</b>								
<b>FRI630</b>								
<b>Bypass valve</b>								
<b>B</b> With bypass 2.4 bar								
<b>S</b> Without bypass								
<b>Seals and treatments</b>								
<b>A</b> NBR								
<b>V</b> FPM								
<b>Connections for FRI100</b>	<b>Connections for FRI250</b>	<b>Connections for FRI630</b>						
<b>G1</b> G 1"	<b>G1</b> 1 1/2"	<b>G2</b> 2 1/2"						
<b>G2</b> 1" NPT	<b>1 1/2" NPT</b>	<b>2 1/2" NPT</b>						
<b>G3</b> SAE 16 - 1 5/16" - 12 UN	<b>SAE 24 - 1 7/8" - 12 UN</b>	<b>SAE 32 - 2 1/2" - 12 UN</b>						
<b>F1</b> 1" SAE 3000 psi/M	<b>1 1/2" SAE 3000 psi/M</b>	<b>2 1/2" SAE 3000 psi/M</b>						
<b>F2</b> 1" SAE 3000 psi/UNC	<b>1 1/2" SAE 3000 psi/UNC</b>	<b>2 1/2" SAE 3000 psi/UNC</b>						
<b>Filtration rating (filter media)</b>								
<b>A03</b> Inorganic microfiber 3 µm	<b>M25</b> Wire mesh 25 µm							
<b>A06</b> Inorganic microfiber 6 µm	<b>M60</b> Wire mesh 60 µm							
<b>A10</b> Inorganic microfiber 10 µm	<b>M90</b> Wire mesh 90 µm							
<b>A16</b> Inorganic microfiber 16 µm	<b>P10</b> Resin impregnated paper 10 µm							
<b>A25</b> Inorganic microfiber 25 µm	<b>P25</b> Resin impregnated paper 25 µm							
<b>Element Δp</b>								
<b>N</b> 10 bar								
<b>Execution</b>								
<b>P01</b> MP Filtri standard								
<b>Pxx</b> Customized								

**FILTER ELEMENT**

<b>Element series and size</b>	Configuration example 1:	CU100	A25	N	P01
<b>CU100</b>	Configuration example 2:	CU630	M25	V	P01
<b>CU250</b>					
<b>CU630</b>					
<b>Filtration rating (filter media)</b>					
<b>A03</b> Inorganic microfiber 3 µm	<b>M25</b> Wire mesh 25 µm				
<b>A06</b> Inorganic microfiber 6 µm	<b>M60</b> Wire mesh 60 µm				
<b>A10</b> Inorganic microfiber 10 µm	<b>M90</b> Wire mesh 90 µm				
<b>A16</b> Inorganic microfiber 16 µm	<b>P10</b> Resin impregnated paper 10 µm				
<b>A25</b> Inorganic microfiber 25 µm	<b>P25</b> Resin impregnated paper 25 µm				
<b>Seals and treatments</b>					
<b>N</b> NBR					
<b>V</b> FPM					
<b>Execution</b>					
<b>P01</b> MP Filtri standard					
<b>Pxx</b> Customized					

**CLOGGING INDICATORS**



See page 720-721

<b>DEA</b> Electrical differential pressure indicator	<b>DLE</b> Electrical / visual differential pressure indicator
<b>DEM</b> Electrical differential pressure indicator	<b>DTA</b> Electronic differential pressure indicator
<b>DEU</b> Electrical differential pressure indicator	<b>DVA</b> Visual differential pressure indicator
<b>DLA</b> Electrical / visual differential pressure indicator	<b>DVM</b> Visual differential pressure indicator



**PLUGS**



See page 747

<b>T2</b> Plug (not included)
-------------------------------

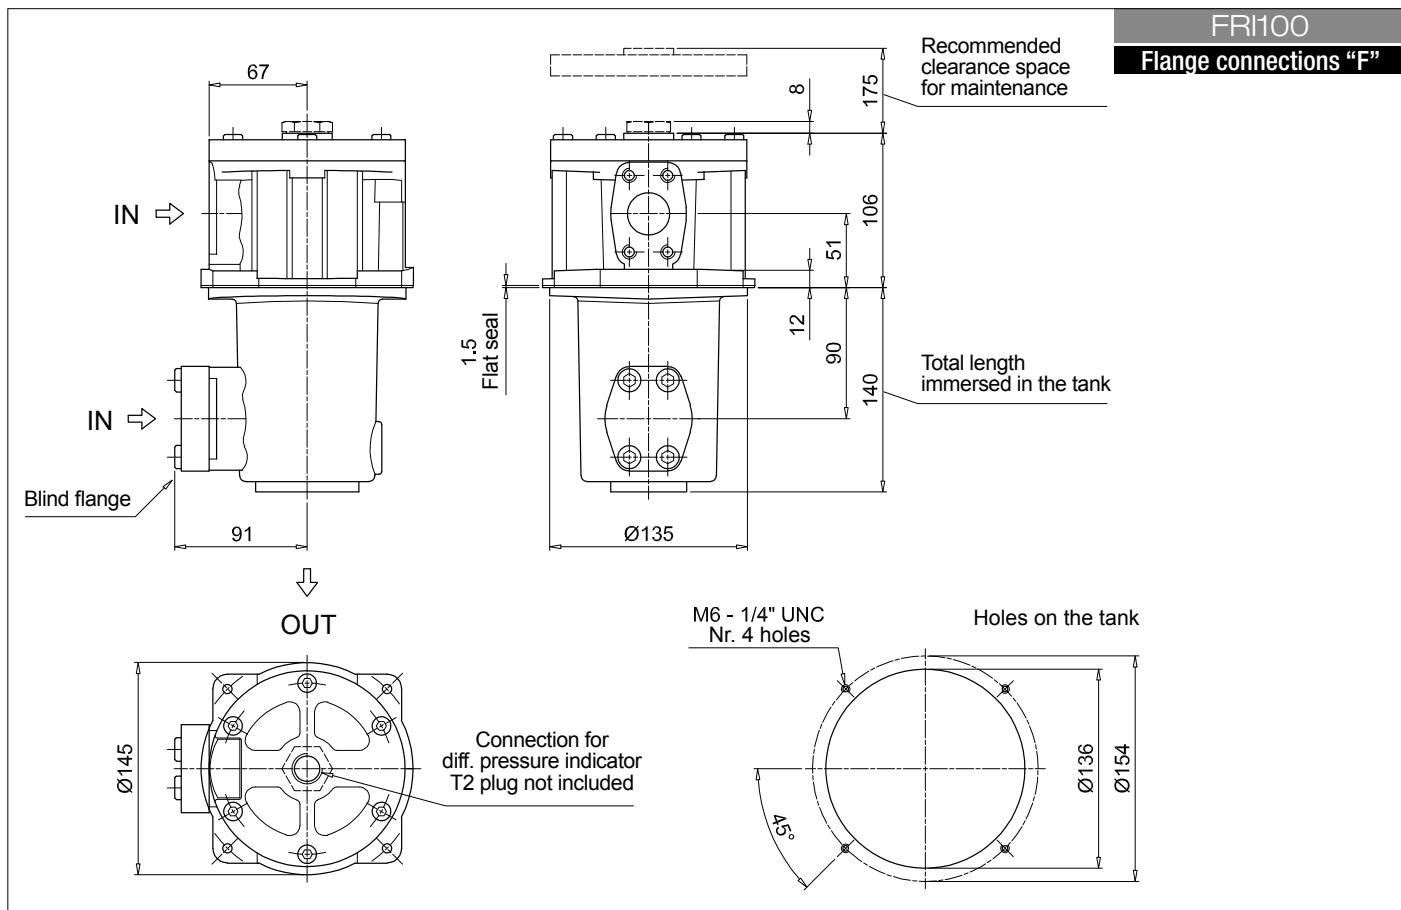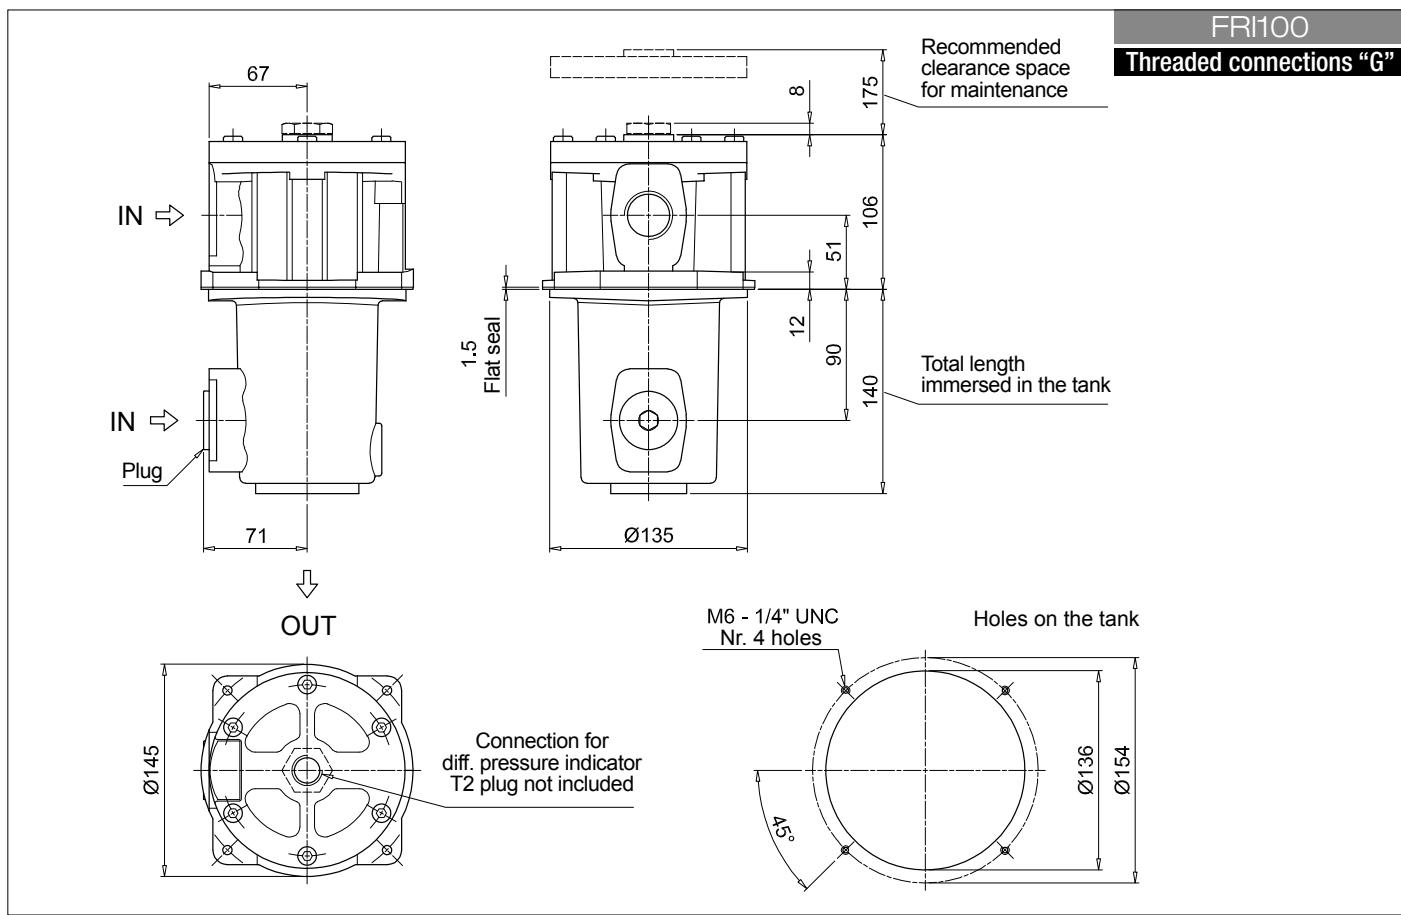

## Dimensions

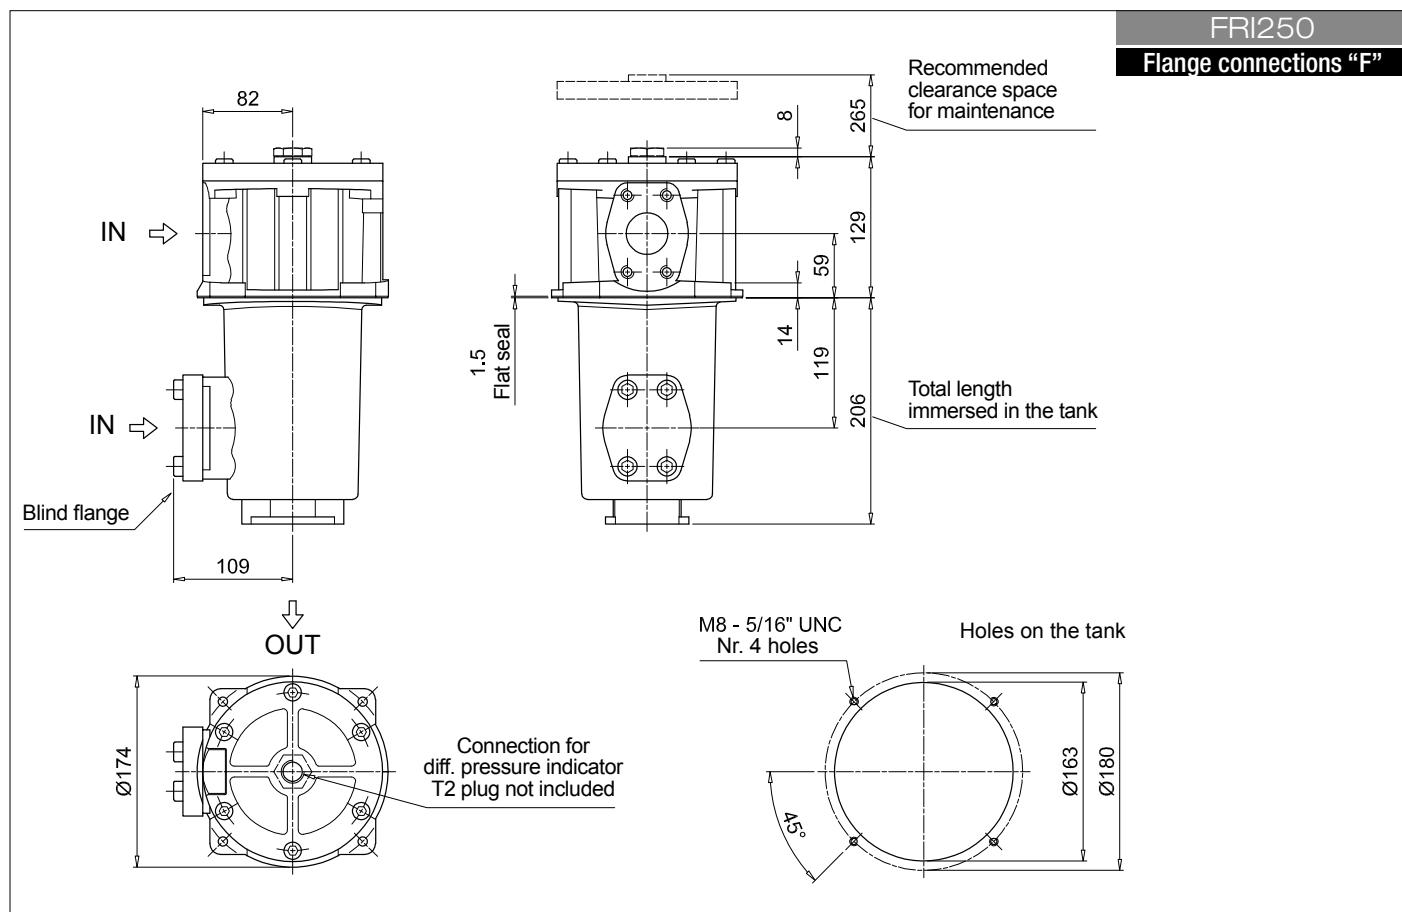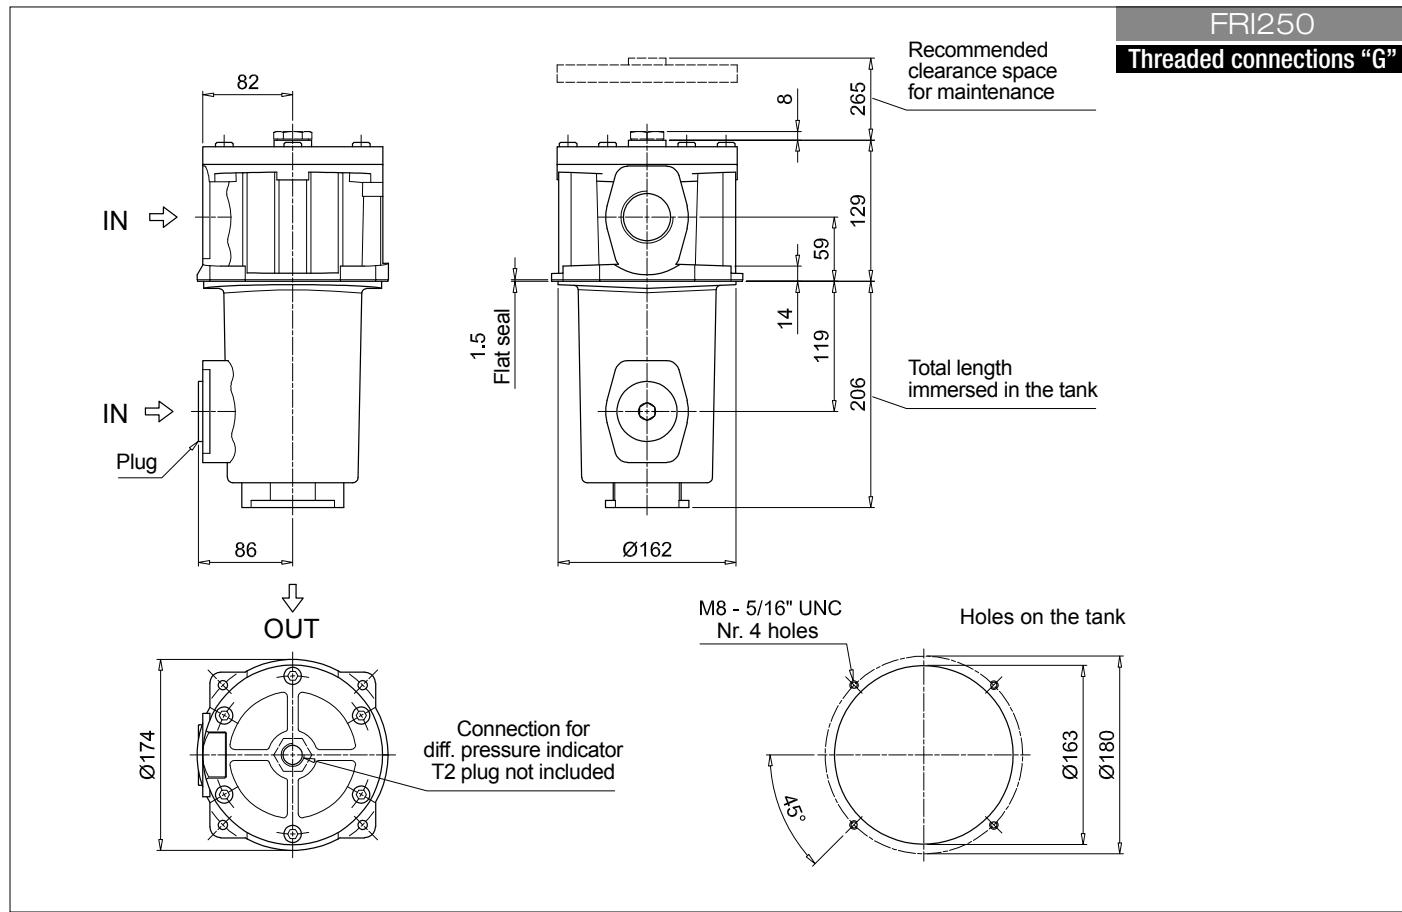

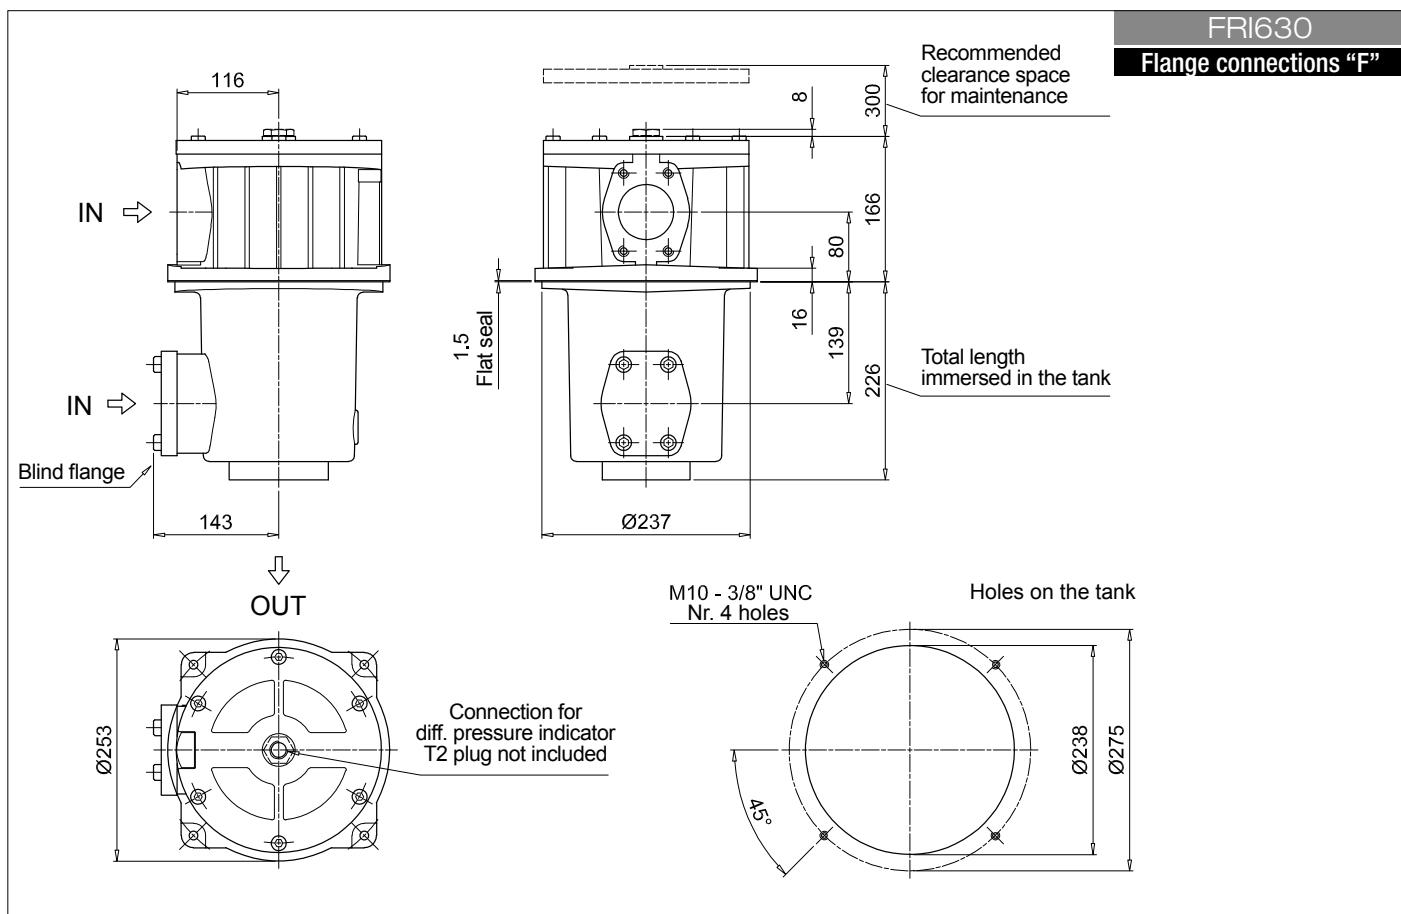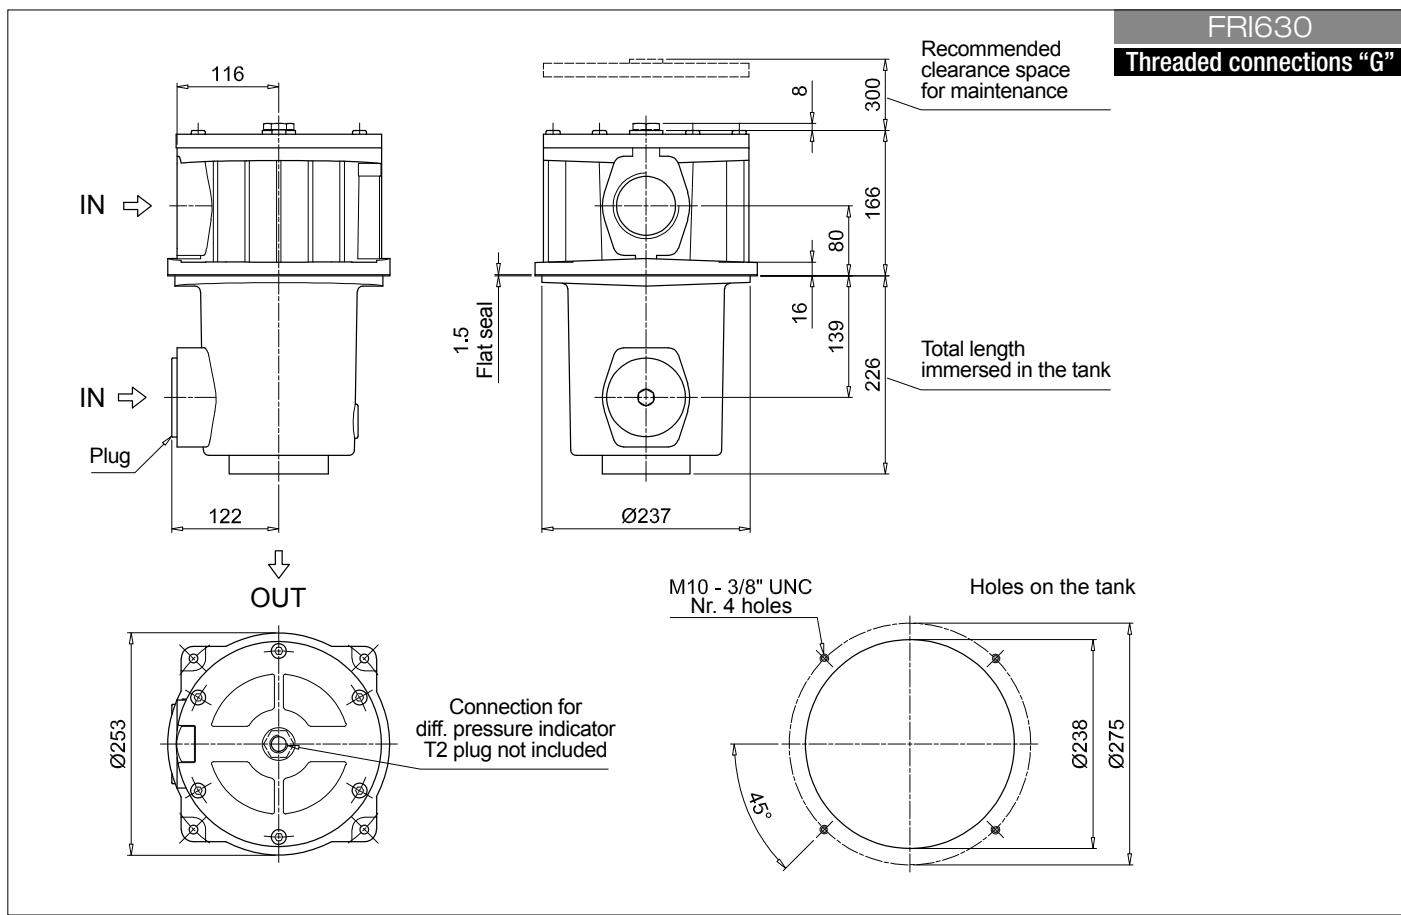



## Designation &amp; Ordering code

COMPLETE FILTER							
Series and size	Configuration example 1:				FRI255	S	V
FRI255	Configuration example 2:				FRI850	B	A
FRI850					F2	M25	N
Bypass valve					A25	V	P01
B With bypass 2.4 bar							
S Without bypass							
Seals for FRI255	Seals and treatments for FRI850				Filtration rating		
A NBR	A	NBR	Axx	Mxx	Pxx	•	•
V FPM	V	FPM		•	•	•	
	W	NBR head anodized		•	•	-	
	Z	FPM head anodized		•	•	-	
Connections for FRI255	Connections for FRI850						
G1 G 1 1/2"	F1	3 1/2" SAE 3000 psi/M					
G2 1 1/2" NPT	F2	3 1/2" SAE 3000 psi/UNC					
G3 SAE 24 - 1 7/8" - 12 UN							
G4 G 1 1/4"							
G5 1 1/4" NPT							
G6 SAE 20 - 1 5/8" - 12 UN							
F1 1 1/2" SAE 3000 psi/M							
F2 1 1/2" SAE 3000 psi/UNC							
Filtration rating (filter media)							
A03 Inorganic microfiber 3 µm	M25	Wire mesh 25 µm					
A06 Inorganic microfiber 6 µm	M60	Wire mesh 60 µm					
A10 Inorganic microfiber 10 µm	M90	Wire mesh 90 µm					
A16 Inorganic microfiber 16 µm	P10	Resin impregnated paper 10 µm					
A25 Inorganic microfiber 25 µm	P25	Resin impregnated paper 25 µm					
Element series and size					Element Δp	Execution	
CU250	N	10 bar	P01	MP Filtri standard			
CU850			Pxx	Customized			

FILTER ELEMENT							
Element series and size	Configuration example 1:				CU250	M25	V
CU250	Configuration example 2:				CU850	A25	N
CU850							P01
Filtration rating (filter media)							
A03 Inorganic microfiber 3 µm	M25	Wire mesh 25 µm					
A06 Inorganic microfiber 6 µm	M60	Wire mesh 60 µm					
A10 Inorganic microfiber 10 µm	M90	Wire mesh 90 µm					
A16 Inorganic microfiber 16 µm	P10	Resin impregnated paper 10 µm					
A25 Inorganic microfiber 25 µm	P25	Resin impregnated paper 25 µm					
Seals for FRI255	Seals and treatments for FRI850				Filtration rating	Execution	
N NBR	N	NBR	Axx	Mxx	Pxx	P01	MP Filtri standard
V FPM	V	FPM		•	•	Pxx	Customized
	W	NBR head anodized		•	•		
	Z	FPM head anodized		•	•		


FRI255 CLOGGING INDICATORS				See page 720-721
BVA Axial pressure gauge	BEA	Electrical pressure indicator		
BVR Radial pressure gauge	BEM	Electrical pressure indicator		
BVP Visual pressure indicator with automatic reset	BLA	Electrical / visual pressure indicator		
BVQ Visual pressure indicator with manual reset				

FRI850 CLOGGING INDICATORS				See page 720-721
DEA Electrical differential pressure indicator	DTA	Electrical differential pressure indicator		
DEM Electrical differential pressure indicator	DVA	Visual differential pressure indicator		
DLA Electrical / visual differential pressure indicator	DVM	Visual differential pressure indicator		
DLE Electrical / visual differential pressure indicator				
T2 Plug (not included)	PLUGS			
	See page 747			

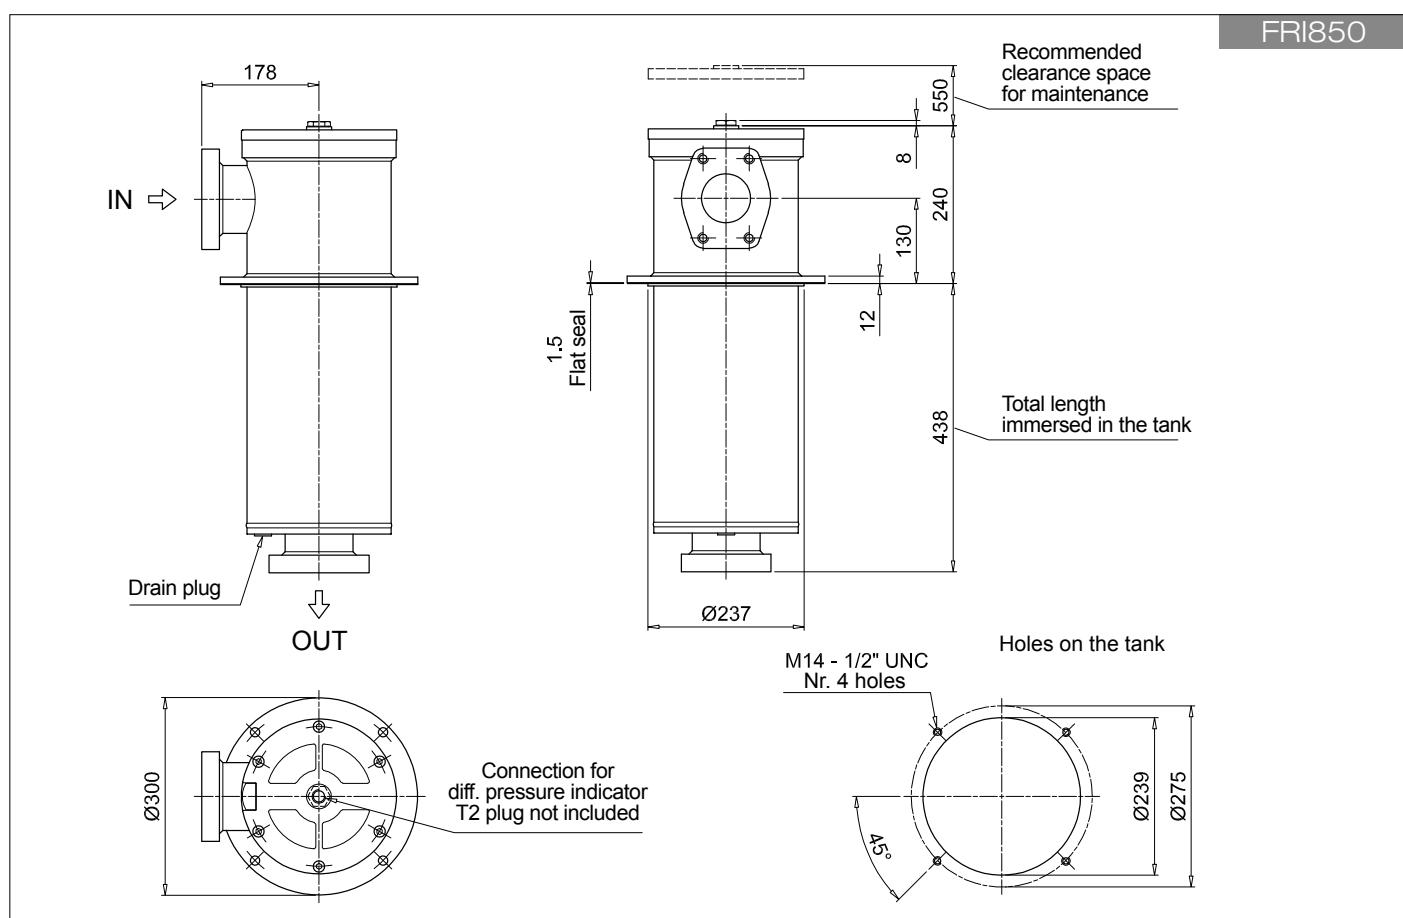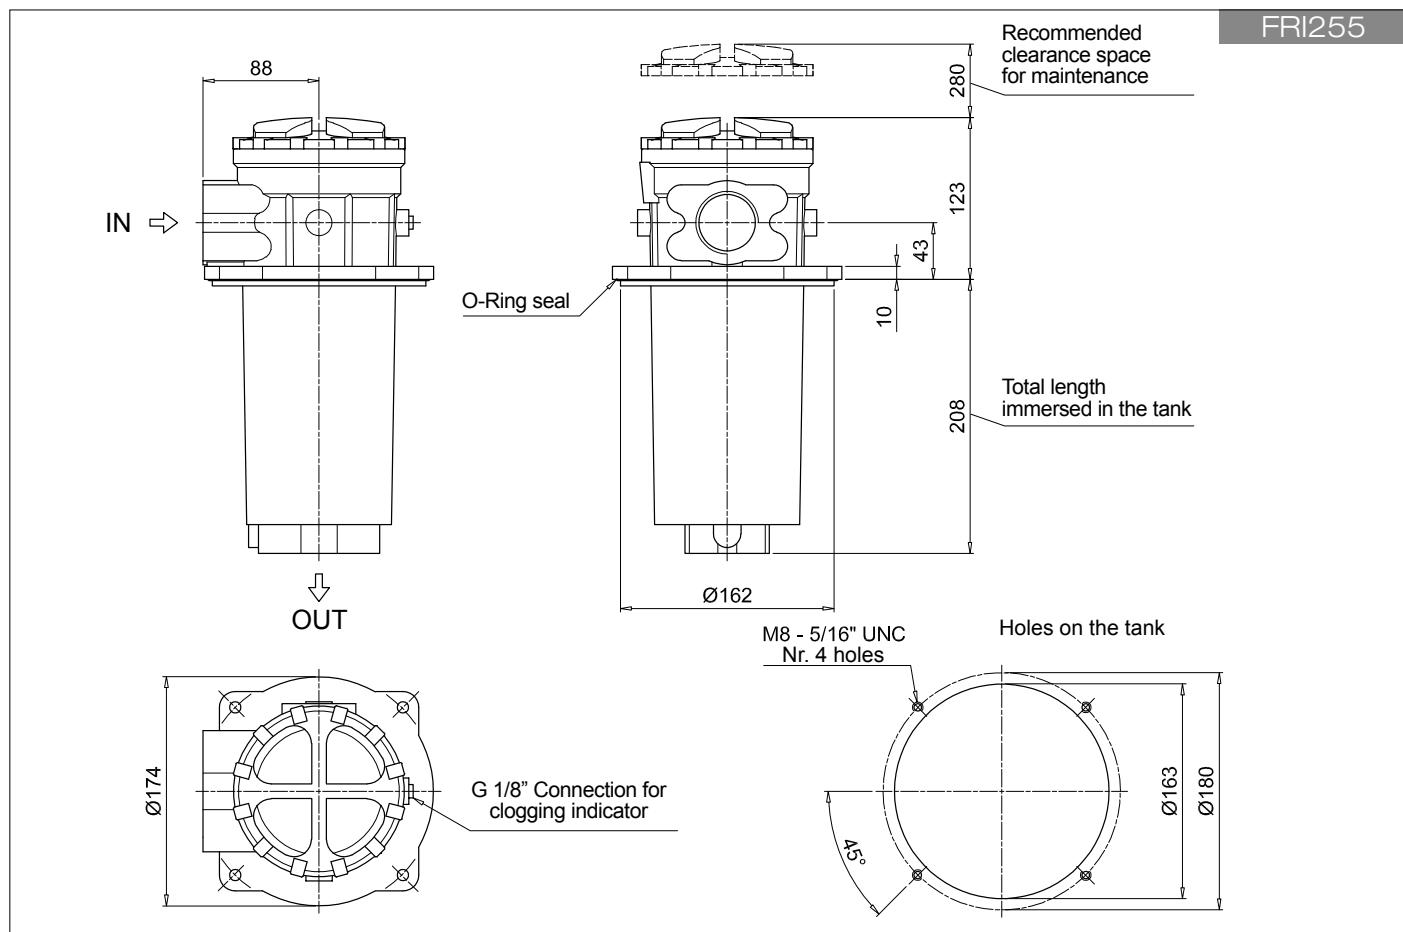


Order number for spare parts

FRI 025 - 040

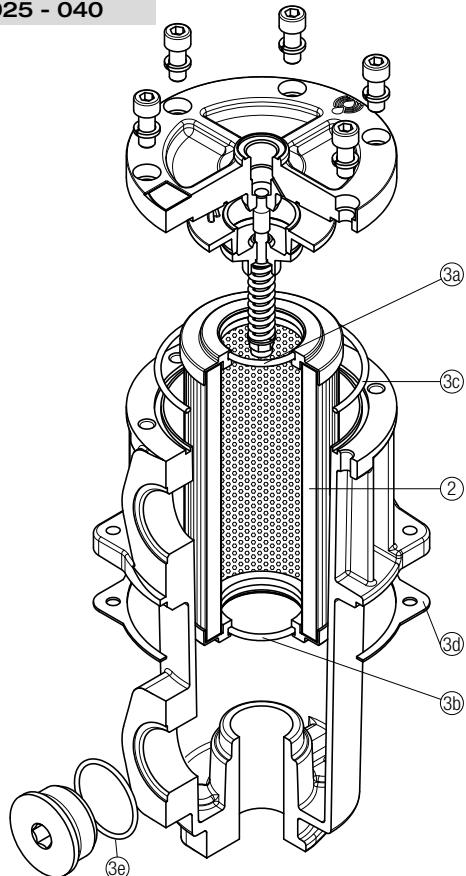


Item:	Q.ty: 1 pc.	Q.ty: 1 pc.
Filter series	2	3 (3a ÷ 3e)
FRI 025	See order table	02050213
FRI 040		02050214
		02050220
		02050221

FRI 100 - 250 - 630

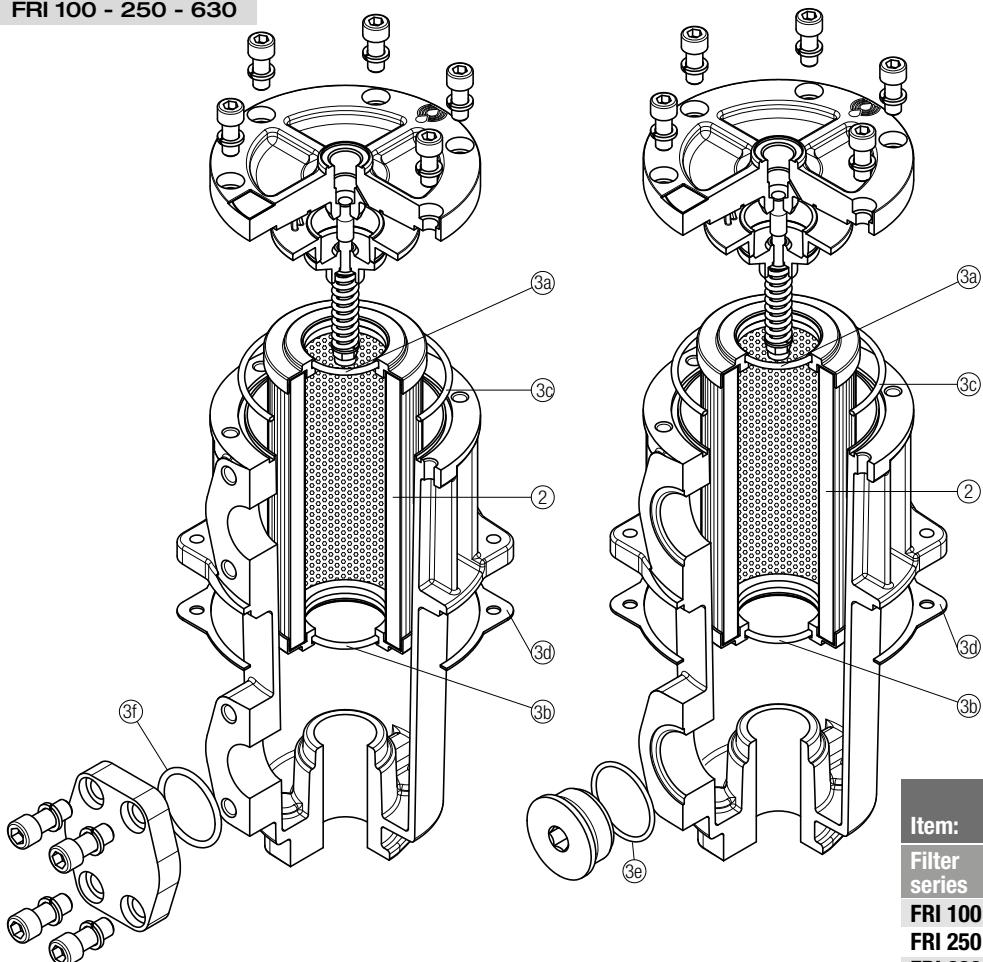


Item:	Q.ty: 1 pc.	Q.ty: 1 pc.
Filter series	2	3 (3a ÷ 3f)
FRI 100	See order table	02050215
FRI 250		02050216
FRI 630		02050217
		02050222
		02050223
		02050224

## FRI 255

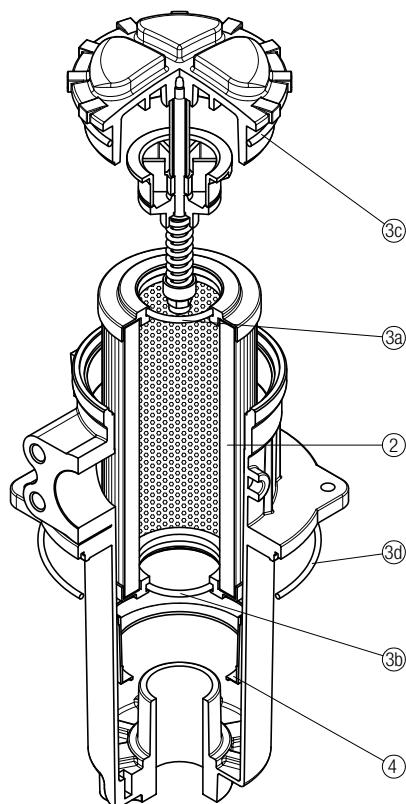

Item:	Q.ty: 1 pc. ②	Q.ty: 1 pc. ③ (3a ÷ 3d)	Q.ty: 1 pc. ④
Filter series	Filter element	Seal Kit code number NBR FPM	Contamination retainer binder
FRI 255	See order table	02050013    02050014	01060301

## FRI 850

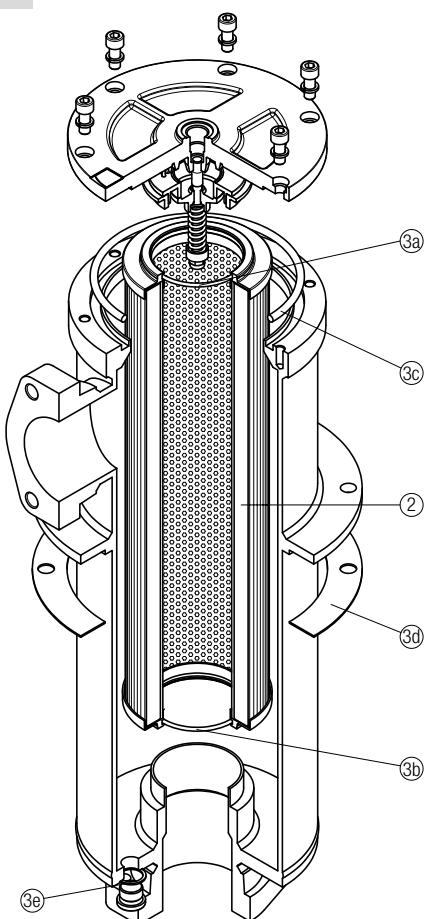

Item:	Q.ty: 1 pc. ②	Q.ty: 1 pc. ③ (3a ÷ 3e)
Filter series	Filter element	Seal Kit code number NBR FPM
FRI 850	See order table	02050218    02050225

# CLOGGING INDICATORS

# RETURN FILTERS

Designation & Ordering code

## BAROMETRIC (PRESSURE) INDICATORS

Series	BE Electrical pressure indicator	BL Electrical/Visual pressure indicator	BV Visual pressure indicator	Configuration example 1: BE A 15 H A 41 P01 EX		
BE	Electrical pressure indicator	BL	BV	Configuration example 2: BL A 20 H A 71 P01		
BL	Electrical/Visual pressure indicator			Configuration example 3: BV R 14 P01		
BV	Visual pressure indicator			Configuration example 4: BV P 20 H P01		
Type	BE	BL	BV			
A Standard type	•	•	A Axial connection pressure gauge			
M With wired electrical connection	•	-	R Radial connection pressure gauge			
T With thermal switch	•	-	P Visual indicator with automatic reset			
			Q Visual indicator with manual reset			
Pressure setting	BEA-BEM	BET	BLA	BVA-BVR	BVP-BVQ	
14 1.4 bar	-	-	-	•	-	
15 1.5 bar	•	-	•	-	•	
20 2.0 bar	•	•	•	-	•	
25 2.5 bar	-	•	-	•	-	
Seals	BE	BLA	BVA-BVR	BVP-BVQ		
H HNBR	•	•	-	•		
Thermostat	BEA-BEM	BET	BLA			
A Without thermostat	•	-	•			
F With thermostat	-	•	-			
Electrical connections	BEA	BEM	BET	BL		
10 Connection AMP Superseal series 1,5	-	-	•	-		
30 Connection Deutsch DT-04-2-P	-	-	•	-		
41 Connection via four-core cable	-	•	-	-		
50 Connection EN 175301-803	•	-	-	-		
51 Connection EN 175301-803, transparent base with lamps 24 Vdc	-	-	-	•		
52 Connection EN 175301-803, transparent base with lamps 110 Vdc	-	-	-	•		
53 Connection EN 175301-803, transparent base with lamps 230 Vac	-	-	-	•		
71 Connection IEC 61076-2-101 D (M12), black base with lamps 24 Vdc	-	-	-	•		
Option						
P01	MP Filtri standard					
Pxx	Customized					
Certifications	BEA	BEM-BET	BL	BV		
Without	•	•	•	•		
EX ATEX certification	•	-	-	-		
UL UL certification	•	-	-	-		

DIFFERENTIAL PRESSURE INDICATORS									
<b>Series</b>									
<b>DE</b>	Electrical differential pressure indicator	DE	M	20	H	F	50	P01	
<b>DL</b>	Electrical/Visual differential pressure indicator	DE	U	50	V	A	50	P01	UL
<b>DT</b>	Electrical differential pressure indicator	DL	E	20	V	A	71	P01	
<b>DV</b>	Visual differential pressure indicator	DT	A	20	H	F	70	P01	
Configuration example 1:									
Configuration example 2:									
Configuration example 3:									
Configuration example 4:									
Configuration example 5:									
Type									
<b>A</b>	Standard type	DE	DL	DT	DV				
<b>M</b>	With wired electrical connection	•	-	-	<b>A</b>	With automatic reset			
<b>U</b>	Standard type 210 bar, UL certified	•	-	-	<b>M</b>	With manual reset			
<b>E</b>	For high power supply	-	•	-	<b>S</b>	With automatic reset			
<b>S</b>	Compact version	•	-	-					
Pressure setting									
<b>12</b>	1.2 bar	-	-	-	•	-	-	-	•
<b>20</b>	2.0 bar	•	•	•	-	•	•	•	
<b>25</b>	2.5 bar	-	-	-	•	-	-	-	•
Seals									
<b>H</b>	HNBR	•	•	-	•	•	•	•	•
<b>V</b>	FPM	•	•	•	-	•	•	•	-
Thermostat									
<b>A</b>	Without thermostat	•	•	•	•	•	•	•	-
<b>F</b>	With thermostat	-	•	-	-	-	•	•	
Electrical connections									
<b>10</b>	Connection AMP Superseal series 1.5	-	-	-	•	-	•	-	-
<b>20</b>	Connection AMP Timer Junior	-	-	-	•	-	-	-	-
<b>30</b>	Connection Deutsch DT-04-2-P	-	-	-	•	-	•	-	-
<b>35</b>	Connection Deutsch DT-04-3-P	-	-	-	•	-	-	-	-
<b>50</b>	Connection EN 175301-803	-	-	-	•	-	•	-	-
<b>51</b>	Connection EN 175301-803, transparent base with lamps 24 Vdc	-	-	-	-	-	•	-	-
<b>52</b>	Connection EN 175301-803, transparent base with lamps 110 Vdc	-	-	-	-	-	•	-	-
<b>70</b>	Connection IEC 61076-2-101 D (M12)	-	-	-	-	-	-	-	•
<b>71</b>	Connection IEC 61076-2-101 D (M12), black base with lamps 24 Vdc	-	-	-	-	-	•	-	-
<b>80</b>	Connection Stud #10-32 UNF	-	-	-	-	-	•	-	-
Option									
<b>P01</b>	MP Filtri standard								
<b>Pxx</b>	Customized								
Certifications									
<b>DEU</b>	Without	-	-						•
<b>UL</b>	UL certification	-	-						-

PLUGS									
<b>Series</b>									
<b>T2</b>	Plug								
<b>T4</b>	Plug								
<b>Seals</b>									
<b>A</b>	NBR	-	•						
<b>H</b>	HNBR	•	-						
<b>V</b>	FPM	•	-						
Configuration example									
<b>T2</b>									<b>H</b>